



TECHNICAL PARAMETERS

Index:	060625/P
Ingress protection:	IP40
Nominal power [W]:	26
Luminous flux [lm]*:	1950
Colour temperature [K]:	3000
Colour rendering index:	>80
Electrical protection class:	II
Energy efficiency class:	A
Diffuser type:	OPAL
Mounting version:	surface

CHARACTERISTICS

Surface-mounted downlight luminaire equipped with energy-saving LED light source. Body made of white powder-coated aluminium ensures optimal conditions for the LED operation . The diffuser is made of highly transparent PMMA to guarantee high luminous flux. Colour temperature 3000K, 4000K; CRI>80.

APPLICATION


The surface mounted luminaire is intended for indoor use: in offices, passageways, general utility rooms. Due to the high energy saving and even light distribution on the surface, it is recommended for use in public buildings.

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Nominal power [W]:	26	Colour of the body:	white
Colour temperature [K]:	3000	Mounting dimensions [mm]:	155
Luminous flux [lm]:	1950	Ingress protection:	IP40
Diffuser type:	OPAL	Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	ø215/80	Working temperature [°C]:	from -10 to +35
Energy efficiency class:	A	Index:	060625/P
Supply voltage [V]:	220-240	CE certificate:	<a href="#">43/2018</a>
Frequency [Hz]:	50 - 60	EAN:	5905963060625
Luminous efficacy [lm/W]:	75	Category type:	downlights
Electrical protection class:	II	Warranty [years]:	5
Colour rendering index:	>80	ETIM class:	EC002892
LED lifespan L70B50 [h]:	35000	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser material:	PMMA	Manual:	<a href="#">Download PDF</a>
Material of the body:	aluminium		

### LIGHT CURVES

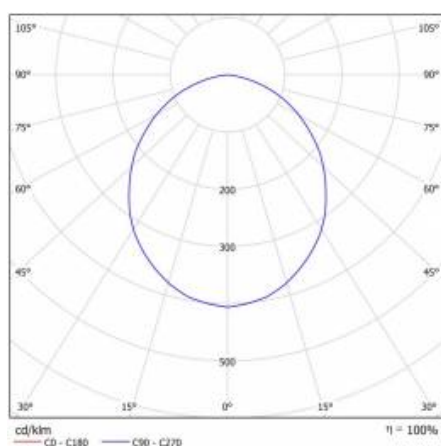

Card creation date: 03 April 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 43/2018



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)