

# BARIS 40 LED Z 1450LM PRM I CL. IP20 860MM 830 14W BLACK

DETAILED CARD



## TECHNICAL PARAMETERS

|   |           |
|---|-----------|
| <b>Index:</b>                             | 930959    |
| <b>Rated power of the luminaire [W]*:</b> | 14        |
| <b>Luminous flux [lm]*:</b>               | 1450      |
| <b>Colour temperature [K]:</b>            | 3000      |
| <b>Ingress protection:</b>                | IP20      |
| <b>Energy efficiency class:</b>           | E         |
| <b>Material of the body:</b>              | aluminium |
| <b>Colour of the body:</b>                | black     |
| <b>Diffuser material:</b>                 | PC        |
| <b>Diffuser type:</b>                     | PRM       |

## CHARACTERISTICS

Suspended or surface-mounted luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). The optical system in the form of an opal cover. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmittance than the opal diffuser, which has a direct impact on a higher value of luminous efficacy. The luminaire is equipped with a unique suspension system that facilitates mounting and adjustment of the suspension length. All BARIS 40 LED suspended luminaires to have 1.2m long slings in a set with a box.

## APPLICATION

The luminaire is intended for indoor use. Especially recommended as a source of main lighting conducive to office work. Unique design, energy-saving LED modules and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern A+ class office buildings, with particular emphasis on representative rooms. Wall lamps are intended, among others for use in corridors, passageways as well as sanitary rooms and bathrooms, where IP44 class is required


# BARIS 40 LED Z 1450LM PRM I CL. IP20 860MM 830 14W BLACK

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|  |               |                                  |   |
|--|---------------|----------------------------------|---|
| <b>Index:</b>                            | 930959        | <b>Mounting dimensions [mm]:</b> | 720   |
| <b>EAN:</b>                              | 5905963930959 | <b>Ingress protection:</b>       | IP20  |
| <b>Light source:</b>                     | LED           | <b>Mounting version:</b>         | suspended   |
| <b>Rated power of the luminaire [W]:</b> | 14            | <b>Net weight [kg]:</b>          | 1   |
| <b>Nominal power [W]:</b>                | 13            | <b>Category type:</b>            | battens   |
| <b>Frequency [Hz]:</b>                   | 50 - 60       | <b>AC voltage range [V]:</b>     | 198 - 264   |
| <b>Luminous flux [lm]:</b>               | 1450          | <b>LED lifespan L70B50 [h]:</b>  | 111500  |
| <b>Luminous efficacy [lm/W]:</b>         | 110           | <b>LED lifespan L80B20 [h]:</b>  | 70400   |
| <b>Energy efficiency class:</b>          | E             | <b>LED lifespan L90B10 [h]:</b>  | 34000   |
| <b>Electrical protection class:</b>      | I             | <b>Product line:</b>             | 860   |
| <b>Colour temperature [K]:</b>           | 3000          | <b>Supply voltage [V]:</b>       | 220 - 240   |
| <b>Colour rendering index:</b>           | >80           | <b>Optics:</b>                   | Microprism  |
| <b>SDCM:</b>                             | ≤ 3           | <b>Impact resistance:</b>        | IK03  |
| <b>Power factor:</b>                     | 0.85          | <b>Working temperature [°C]:</b> | from -25 to +35   |
| <b>Diffuser material:</b>                | PC            | <b>Photobiological safety:</b>   | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| <b>Diffuser type:</b>                    | PRM           | <b>CE certificate:</b>           | <a href="#">237/2023</a>  |
| <b>Diffuser colour:</b>                  | clear         | <b>ENEC Certificate:</b>         | <a href="#">PL BBJ/003/2022/M1/A1</a>                                       |
| <b>Material of the body:</b>             | aluminium     | <b>PZH certificate:</b>          |   |
| <b>Colour of the body:</b>               | black         | <b>Warranty [years]:</b>         | 5   |
| <b>Dimensions (H/W/T/S) [mm]:</b>        | 53/40/860     | <b>Manual:</b>                   | <a href="#">Download PDF</a>  |

## LIGHT CURVES

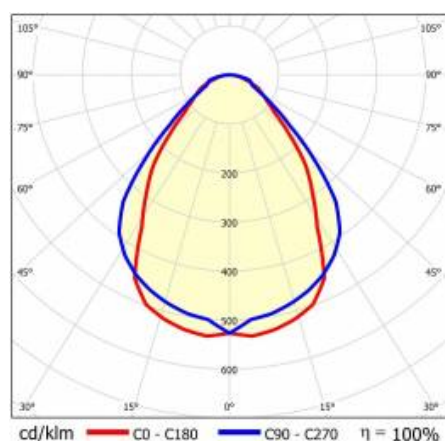

Card creation date: 08 July 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 237/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl