


BARIS 52 LED BRACKET 860MM 2600LM 830 IP44 I CL. DALI PRM WHITE 26W

DETAILED CARD

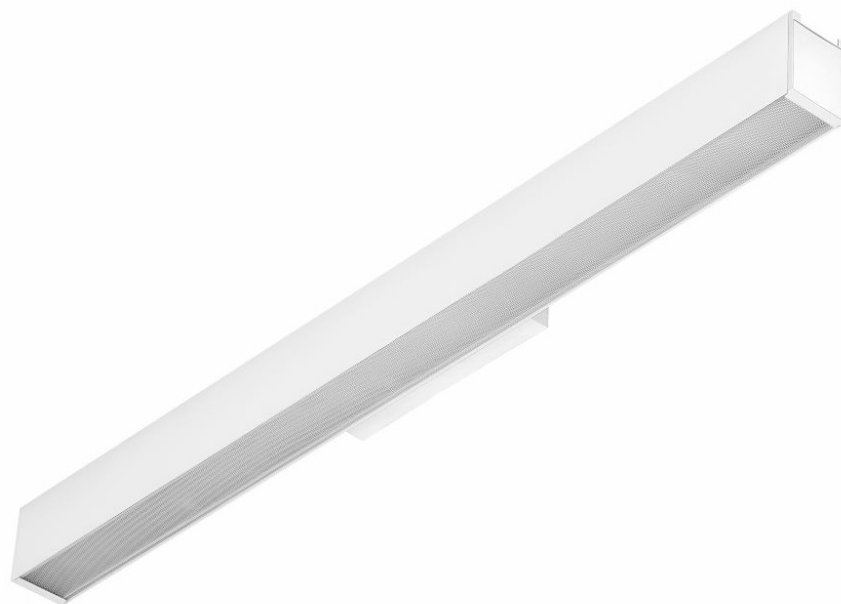

TECHNICAL PARAMETERS

Rated power [W] - range:	13.00-39.00
Luminous flux of the luminaire [lm] - range:	1100-4450
Colour temperature [K]:	3000; 4000
Ingress protection:	IP44
Impact resistance:	IK03
Material of the body:	aluminium
Colour of the body:	biały; czarny; szary
Diffuser material:	PC
Diffuser type:	OPAL; PRM
Mounting version:	natynkowy, naścienny

CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms.

The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.


BARIS 52 LED BRACKET 860MM 2600LM 830 IP44 I CL. DALI PRM WHITE 26W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	x	Diffuser type:	OPAL; PRM
EAN:	x	Diffuser colour:	mleczny; przezroczysty
Light source:	moduł LED	Optics:	Mikropryzma; brak
Rated power [W] - range:	13.00-39.00	Material of the body:	aluminium
Nominal power [W] - range:	13. 25. 25/13	Colour of the body:	biały; czarny; szary
Luminous flux of the luminaire [lm] - range:	1100-4450	Dimensions (H/W/T/S) [mm]:	82/69/864
Supply voltage [V]:	220 - 240	Impact resistance:	IK03
Frequency [Hz]:	50 - 60	Ingress protection:	IP44
Energy efficiency class:	D; E	Mounting version:	natynkowy, naścienny
Electrical protection class:	I	Working temperature [°C]:	od -25 do +35
Colour temperature [K]:	3000; 4000	DIMM DALI:	yes
Colour rendering index:	>80	Control:	DALI
SDCM:	≤ 3	Net weight [kg]:	1.500; 1.600; 1.700; 1.800
LED lifespan L70B50 [h]:	111500	Warranty [years]:	5
LED lifespan L80B20 [h]:	70400	CE certificate:	228/2023
LED lifespan L90B10 [h]:	34000	ENEC Certificate:	PL BBJ/006/2022/M1
Diffuser material:	PC	Manual:	Download PDF

LIGHT CURVES

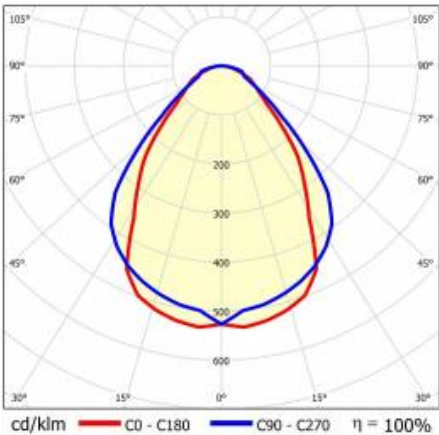

Card creation date: 20 January 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 228/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl