


BARIS 52 LED BRACKET 860MM 2750LM 840 IP44 I CL. DALI PLX BLACK 26W

DETAILED CARD

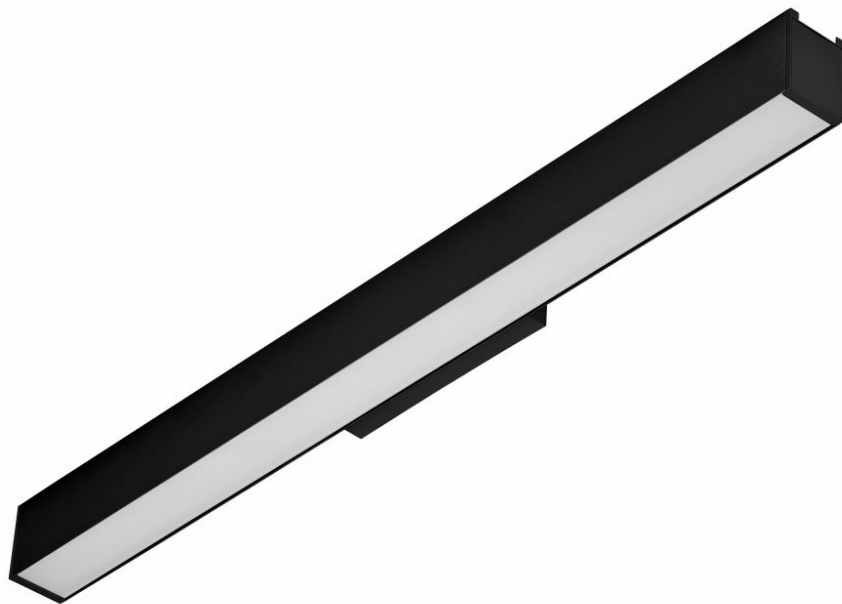

TECHNICAL PARAMETERS

Rated power [W] - range:	26
Luminous flux of the luminaire [lm] - range:	2750
Colour temperature [K]:	4000
Ingress protection:	IP44
Impact resistance:	IK03
Material of the body:	aluminium
Colour of the body:	black
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	surface, wall mounted

CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms. The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.

BARIS 52 LED BRACKET 860MM 2750LM 840 IP44 I CL. DALI PLX BLACK 26W


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Rated power [W] - range:	26
Index:	674921
Colour temperature [K]:	4000
EAN:	5905963674921
Luminous flux of the luminaire [lm] - range:	2750
Light source:	LED module
Diffuser type:	OPAL
Nominal power [W] - range:	25
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Luminous efficacy [lm/W]:	108
Energy efficiency class:	E
Electrical protection class:	I
Colour rendering index:	>80
SDCM:	≤ 3
LED lifespan L70B50 [h]:	111500
LED lifespan L80B20 [h]:	70400
LED lifespan L90B10 [h]:	34000
Colour of the body:	black

Diffuser material:	PC
DIMM DALI:	yes
Dimensions (H/W/T/S) [mm]:	82/69/864
Diffuser colour:	milky
Optics:	no
Material of the body:	aluminium
Impact resistance:	IK03
Ingress protection:	IP44
Mounting version:	surface, wall mounted
Working temperature [°C]:	from -25 to +35
Control:	DALI
Net weight [kg]:	1.600
Warranty [years]:	5
CE certificate:	228/2023
ENEC Certificate:	PL BBJ/006/2022/M1
PZH certificate:	B-BK-60112-0357/2023
Manual:	Download PDF
Plik LDT:	Download

LIGHT CURVES

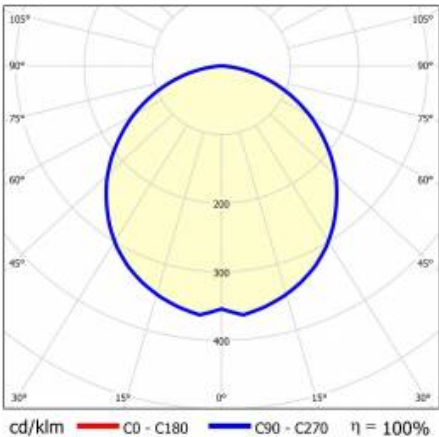

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 228/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl