


# BARIS 52 LED BRACKET DIR/IND 860MM 2550/1500LM 830 IP44 I CL. DALI PRM BLACK 24/13W

DETAILED CARD

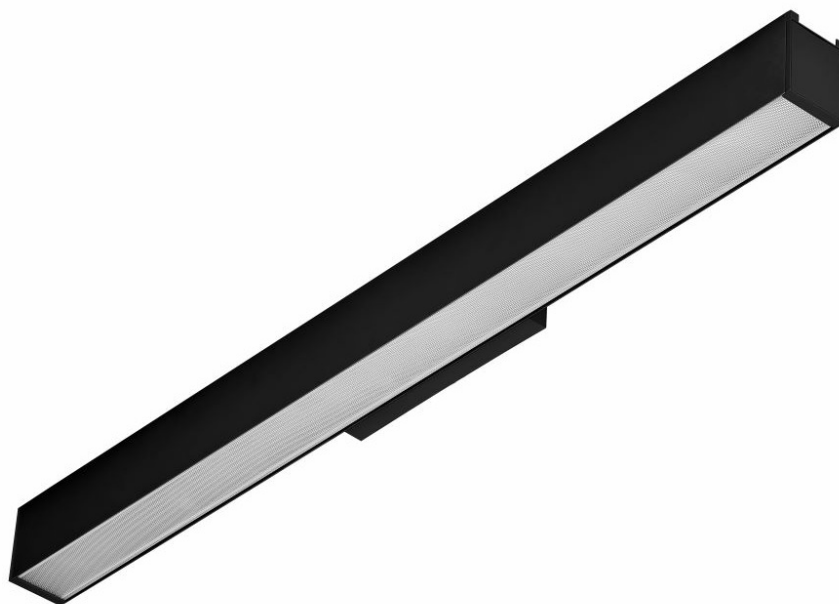

## TECHNICAL PARAMETERS

|  |                       |
|--|-----------------------|
| Rated power [W] - range:                     | 24/13                 |
| Luminous flux of the luminaire [lm] - range: | 2550/1500             |
| Colour temperature [K]:                      | 3000                  |
| Ingress protection:                          | IP44                  |
| Impact resistance:                           | IK06                  |
| Material of the body:                        | aluminium             |
| Colour of the body:                          | black                 |
| Diffuser material:                           | PC                    |
| Diffuser type:                               | PRM                   |
| Mounting version:                            | surface, wall mounted |

## CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

## APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms.

The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.

# BARIS 52 LED BRACKET DIR/IND 860MM 2550/1500LM 830 IP44 I CL. DALI PRM BLACK 24/13W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|  |               |                            |                                      |
|--|---------------|----------------------------|--------------------------------------|
| Index:                                       | 674617        | Diffuser colour:           | transparent                          |
| EAN:   | 5905963674617 | Optics:                    | Microprism                           |
| Light source:                                | LED module    | Material of the body:      | aluminium                            |
| Rated power [W] - range:                     | 24/13         | Colour of the body:        | black                                |
| Nominal power [W] - range:                   | 25/13         | Dimensions (H/W/T/S) [mm]: | 82/69/864                            |
| Luminous flux of the luminaire [lm] - range: | 2550/1500     | Impact resistance:         | IK06                                 |
| Supply voltage [V]:                          | 220 - 240     | Ingress protection:        | IP44                                 |
| Frequency [Hz]:                              | 50 - 60       | Mounting version:          | surface, wall mounted                |
| Luminous efficacy [lm/W]:                    | 111           | Working temperature [°C]:  | from -25 to +35                      |
| Energy efficiency class:                     | E             | DIMM DALI:                 | yes                                  |
| Electrical protection class:                 | I             | Control:                   | DALI                                 |
| Colour temperature [K]:                      | 3000          | Net weight [kg]:           | 1.800                                |
| Colour rendering index:                      | 80            | Warranty [years]:          | 5                                    |
| SDCM:  | ≤ 3           | CE certificate:            | <a href="#">228/2023</a>             |
| LED lifespan L70B50 [h]:                     | 111500        | ENEC Certificate:          | <a href="#">PL BBJ/006/2022/M1</a>   |
| LED lifespan L80B20 [h]:                     | 70400         | PZH certificate:           | <a href="#">B-BK-60112-0357/2023</a> |
| LED lifespan L90B10 [h]:                     | 34000         | Manual:                    | <a href="#">Download PDF</a>         |
| Diffuser material:                           | PC            | Plik LDT:                  | <a href="#">Download</a>             |
| Diffuser type:                               | PRM           |                            |                                      |

## LIGHT CURVES

