
BARIS 52 LED KINKIET DIR/IND 860MM 3075/1675LM 840 IP40 I CL. DALI PLX BLACK 24/13W

DETAILED CARD

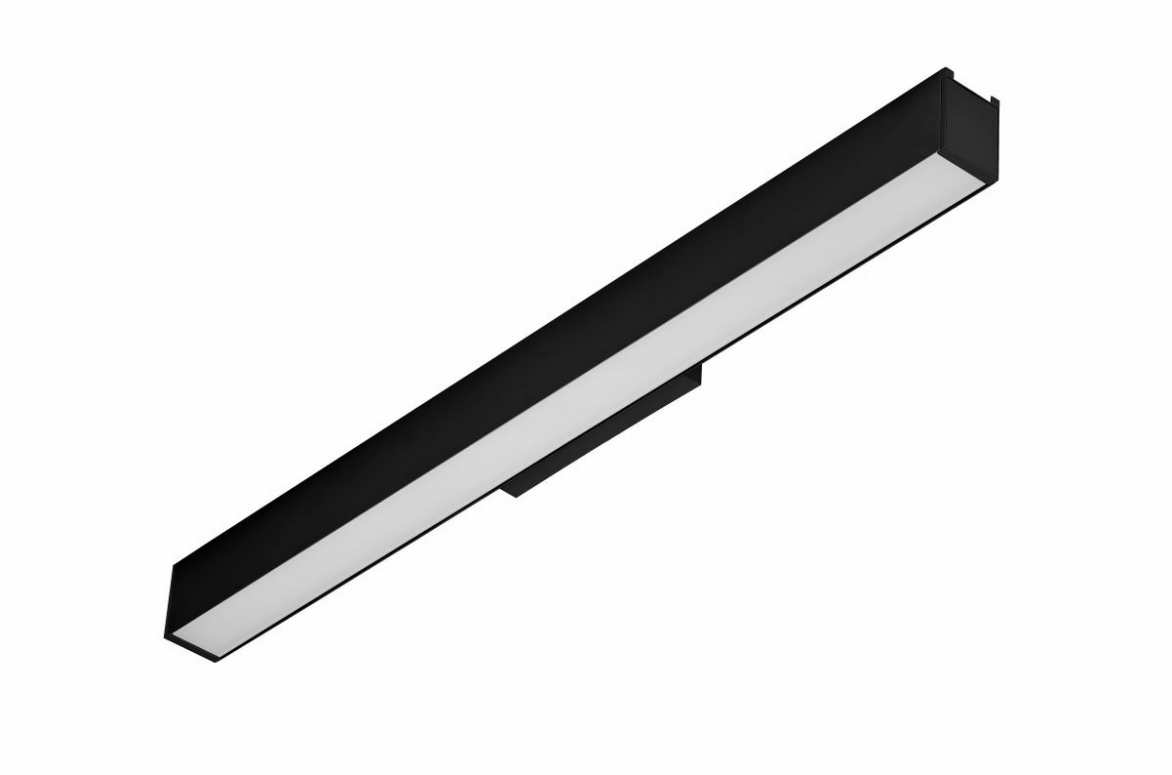

TECHNICAL PARAMETERS

Rated power [W] - range:	24/13
Luminous flux of the luminaire [lm] - range:	3075/1675
Colour temperature [K]:	4000
Ingress protection:	IP40
Impact resistance:	IK06
Material of the body:	aluminium
Colour of the body:	black
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	surface, wall mounted

CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms.

The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.

BARIS 52 LED KINKIET DIR/IND 860MM 3075/1675LM 840 IP40 I CL. DALI PLX BLACK 24/13W


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	674983
EAN:	5905963674983
Light source:	LED module
Rated power [W] - range:	24/13
Nominal power [W] - range:	25/13
Luminous flux of the luminaire [lm] - range:	3075/1675
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Luminous efficacy [lm/W]:	128
Energy efficiency class:	D
Electrical protection class:	I
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
LED lifespan L70B50 [h]:	150000
LED lifespan L80B10 [h]:	100000
LED lifespan L90B10 [h]:	50000
Diffuser material:	PC
Diffuser type:	OPAL
Diffuser colour:	milky

Optics:	no
Material of the body:	aluminium
Colour of the body:	black
Dimensions (H/W/T/S) [mm]:	82/69/864
Impact resistance:	IK06
Ingress protection:	IP40
Mounting version:	surface, wall mounted
Working temperature [°C]:	from 0 to +35
DIMM DALI:	yes
Control:	DALI
Net weight [kg]:	1.800
Category of application:	office lighting
Warranty [years]:	5
CE certificate:	39/2026
ENEC Certificate:	PL BBJ/006/2022/M1
PZH certificate:	B-BK-60112-0357/2023
Manual:	Download PDF
Environmental Product Declaration (EPD):	852/2025
ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Plik LDT:	Download

LIGHT CURVES

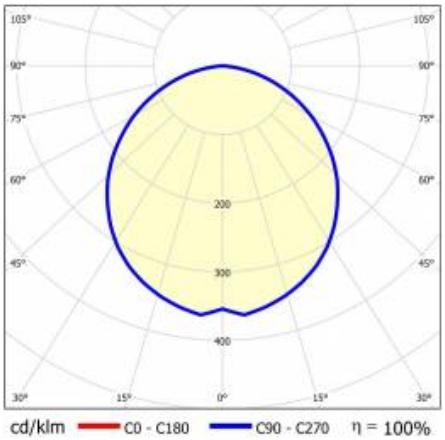

Card creation date: 15 July 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 39/2026

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl