


# SOLANTO Z 1200MM 5060LM 830 IP20 I CL. OPAL WHITE 62W

DETAILED CARD

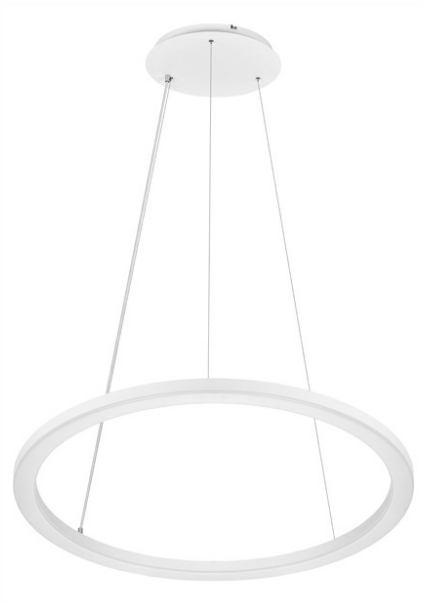

## TECHNICAL PARAMETERS

Light source:	LED module
Rated power [W] - range:	62
Colour temperature [K]:	3000
Luminous flux of the luminaire [lm] - range:	5060
Ingress protection:	IP20
Electrical protection class:	I
Diffuser material:	PMMA
Diffuser type:	OPAL
Colour of the body:	white

## CHARACTERISTICS

Suspended or surface-mounted ring-shaped LED luminaire, allowing for an attractive arrangement of representative interiors. The luminaire is made of steel powder coated in white, black or other color to fit the character of the interior. The milky diffuser made with thermoforming method emphasises the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box.

Multi LED versions allow you to choose from 4 flux and power settings increasing the versatility and functionality of the luminaire, while reducing the number of indexes to the necessary minimum.

## APPLICATION

SOLANTO is an extremely glamorous pendant or surface mounted luminaire, dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can be also used in apartments and apartments, perfectly fitting into stylish surroundings.

# SOLANTO Z 1200MM 5060LM 830 IP20 I CL. OPAL WHITE 62W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	467950	SDCM:	≤ 3
EAN:	5905963467950	LED lifespan L70B50 [h]:	112000
Light source:	LED module	LED lifespan L80B20 [h]:	70 000
Rated power [W] - range:	62	LED lifespan L90B10 [h]:	34000
Luminous flux of the luminaire [lm] - range:	5060	Diffuser material:	PMMA
Colour temperature [K]:	3000	Diffuser type:	OPAL
Colour of the body:	white	Material of the body:	Steel
Dimensions (H/W/T/S) [mm]:	ø1200/32	Ring colour:	white
Supply voltage [V]:	220 - 240	Mounting dimensions [mm]:	340/340
Mounting version:	suspended	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Cable length [m]:	1.35
Luminous efficacy [lm/W]:	82	Net weight [kg]:	5.800
Energy efficiency class:	F	Warranty [years]:	5
Electrical protection class:	I	CE certificate:	<a href="#">218/2023</a>
Colour rendering index:	>80	Manual:	<a href="#">Download PDF</a>
		Plik LDT:	<a href="#">Download</a>