BARIS LED KINKIET 1200LM PLX I CL. IP44 579MM 830 9W ANODE CO

DETAILED CARD



TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	9
Luminous flux [lm]*:	1200
Colour temperature [K]:	3000
Ingress protection:	IP44
Energy efficiency class:	D
Material of the body:	aluminium
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	surface, wall mounted

CHARACTERISTICS

A luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmittance than the opal diffuser, which has a direct impact on a higher value of luminous efficacy.

APPLICATION

The unique design predisposes these luminaires to illuminate: offices, conference rooms, and other representative spaces, in offices, passageways, sanitary rooms, and bathrooms (wall lamps), in public utility buildings.


BARIS LED KINKIET 1200LM PLX I CL. IP44 579MM 830 9W ANODE CO

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	675430	**Ingress protection:**	IP44
Light source:	LED module	**Mounting version:**	surface, wall mounted
Rated power of the luminaire [W]:	9	**Dimensions of single box [mm]:**	76/56/595
Frequency [Hz]:	50 - 60	**Number on the palette [pcs]:**	80
Luminous flux [lm]:	1200	**Net weight [kg]:**	0.700
Luminous efficacy [lm/W]:	133	**Category type:**	luminaires and linear systems
Energy efficiency class:	D	**LED lifespan L70B50 [h]:**	150000
Electrical protection class:	I	**LED lifespan L80B10 [h]:**	100000
Colour temperature [K]:	3000	**LED lifespan L90B10 [h]:**	50000
Color rendering index (Ra) >:	85.7	**Supply voltage [V]:**	220 – 240
SDCM:	3	**Impact resistance:**	IK06
Diffuser material:	PC	**Working temperature [°C]:**	from -25 to +35
Diffuser type:	OPAL	**Warranty [years]:**	5
Diffuser colour:	milky	**CE certificate:**	02/2026
Material of the body:	aluminium	**ENEC Certificate:**	
Colour of the body:	grey	**Manual:**	Download PDF
Dimensions (H/W/T/S) [mm]:	53/71/579	**Environmental Product Declaration (EPD):**	852/2025
Mounting dimensions [mm]:	165	**ISO Certificates:**	9001:2015, 14001:2015, 45001:2018, 50001:2018

LIGHT CURVES

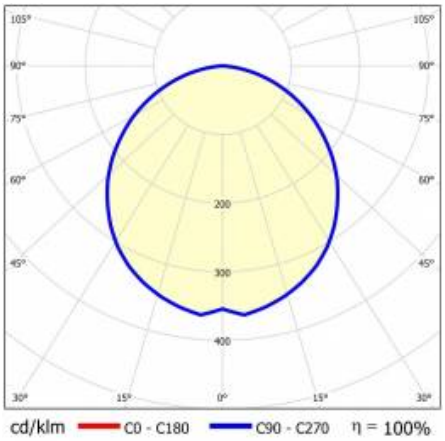

Card creation date: 13 October 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 02/2026

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl