

# BARIS 52 LED P GK CONNECTOR L 3100LM 840 IP20 I CL. PLX WHITE 30W

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	936395
<b>Light source:</b>	LED module
<b>Rated power of the luminaire [W]*:</b>	30
<b>Frequency [Hz]:</b>	50 - 60
<b>Ingress protection:</b>	IP20
<b>Energy efficiency class:</b>	E
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	4000
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

The key feature of L, T, X connectors is that they are equipped with integrated electronics and a diffuser, thanks to which the profile route bends remain illuminated along the entire length. Body is made of anodized aluminium profile in grey or aluminium profile painted white or black (other colors available on request). The optical system is complemented by a dedicated, flexible opal cover that evenly illuminates the connector. There is no division into surface mounted and suspended versions, which make the solution more universal.

Connectors (T, X, L) are supplied with an OPAL diffuser.

Connectors T, X, L UGR, and PRM diffusers are available on request.

## APPLICATION

BARIS 52 LED connectors in the shape of the letter L, T, X and straight connectors create extraordinary opportunities to configure the light line matched to the character and shape of the room, allowing you to create virtually unlimited straight sequences, figures and patterns.


# BARIS 52 LED P GK CONNECTOR L 3100LM 840 IP20 I CL. PLX WHITE 30W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	936395	LED lifespan L80B20 [h]:	70 500
Rated power of the luminaire [W]:	30	Diffuser colour:	milky
EAN:	5905963936067	LED lifespan L90B10 [h]:	34000
Light source:	LED module	Colour of the body:	white
Luminous flux [lm]:	3100	Diffuser material:	PC
Diffuser type:	OPAL	Material of the body:	aluminium
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous efficacy [lm/W]:	107	Dimensions of single box [mm]:	100/680/700
Ingress protection:	IP20	Net weight [kg]:	1.900
Energy efficiency class:	E	Warranty [years]:	5
Electrical protection class:	I	CE certificate:	<a href="#">343/2023</a>
Colour temperature [K]:	4000	Manual:	<a href="#">Download PDF</a>
Colour rendering index:	>80	Impact resistance:	IK03
LED lifespan L70B50 [h]:	112000	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

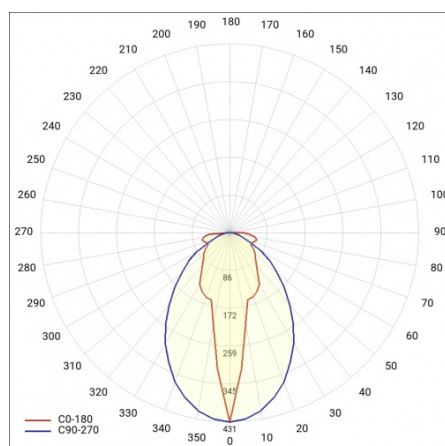

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 343/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl