


# BARIS 52 LED P GK CONNECTOR T 2100LM 840 IP20 I CL. DALI PLX ANODA CO 17W

DETAILED CARD

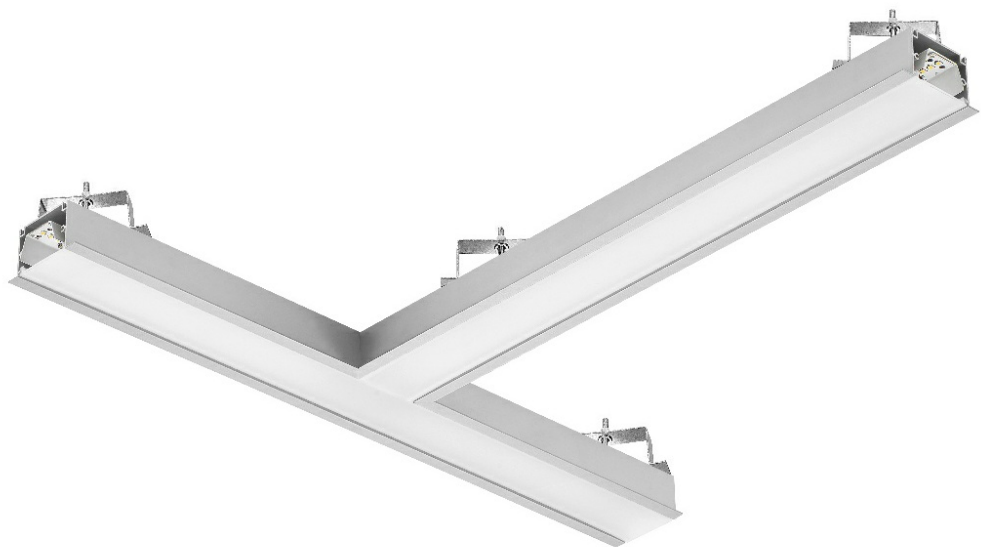

## TECHNICAL PARAMETERS

Index:	936104
Light source:	LED module
Rated power of the luminaire [W]*:	17
Frequency [Hz]:	50 - 60
Ingress protection:	IP20
Energy efficiency class:	E
Electrical protection class:	I
Colour temperature [K]:	4000
Diffuser material:	PC
Diffuser type:	OPAL

## CHARACTERISTICS

The key feature of L, T, X connectors is that they are equipped with integrated electronics and a diffuser, thanks to which the profile route bends remain illuminated along the entire length. Body is made of anodized aluminium profile in grey or aluminium profile painted white or black (other colors available on request). The optical system is complemented by a dedicated, flexible opal cover that evenly illuminates the connector. There is no division into surface mounted and suspended versions, which make the solution more universal.

Connectors (T, X, L) are supplied with an OPAL diffuser.

Connectors T, X, L UGR, and PRM diffusers are available on request.

## APPLICATION

BARIS 52 LED connectors in the shape of the letter L, T, X and straight connectors create extraordinary opportunities to configure the light line matched to the character and shape of the room, allowing you to create virtually unlimited straight sequences, figures and patterns.

# BARIS 52 LED P GK CONNECTOR T 2100LM 840 IP20 I CL. DALI PLX ANODA CO 17W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	936104	Diffuser material:	PC
EAN:	5905963936067	Diffuser type:	OPAL
Light source:	LED module	Diffuser colour:	milky
Rated power of the luminaire [W]:	17	Material of the body:	aluminium
Luminous flux [lm]:	2100	Colour of the body:	grey
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous efficacy [lm/W]:	124	Dimensions of single box [mm]:	100/680/700
Ingress protection:	IP20	Net weight [kg]:	2
Energy efficiency class:	E	Warranty [years]:	5
Electrical protection class:	I	CE certificate:	<a href="#">343/2023</a>
Colour temperature [K]:	4000	Manual:	<a href="#">Download PDF</a>
Colour rendering index:	80	DIMM DALI:	yes
LED lifespan L70B50 [h]:	112000	Impact resistance:	IK03
LED lifespan L80B20 [h]:	70 500	Plik LDT:	<a href="#">Download</a>
LED lifespan L90B10 [h]:	34000		

## LIGHT CURVES



Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 343/2023

**LENA**  
LIGHTING

Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)