
BARIS SQUARE 40 LED Z 1162X1162MM 10900LM PLX I KL. IP20 830 116W BLACK

DETAILED CARD



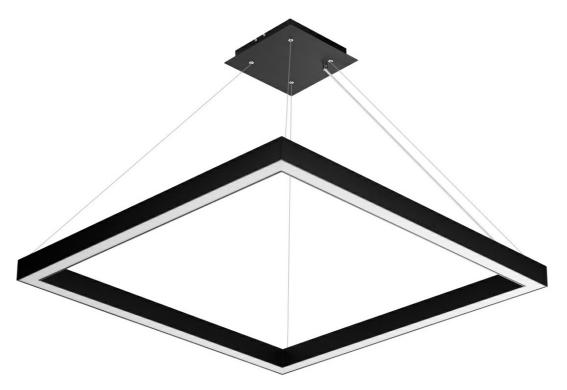

TECHNICAL PARAMETERS

Light source:	LED module
---------------	------------

Rated power of the luminaire [W]*: 116

Luminous flux [lm]*: 10900

Energy efficiency class:

Electrical protection class:

Impact resistance: IK06

Ingress protection: IP20

Colour temperature [K]: 3000

Diffuser colour: milky

Colour of the body: black

CHARACTERISTICS

Baris Square 40 Led is a striking pendant lamp. Its classic shape fits perfectly into modern design. The lamp body is made of anodized aluminum profile in gray or aluminum profile painted in white or black (other colors available on request). The lamp is offered with two types of lampshade - prismatic or milky. The availability of the lamp in three sizes allows you to design the distribution of lighting in an individually tailored way. Lamps of different sizes and hung at different lengths can create an unlimited number of lighting compositions in the room.

APPLICATION

The lamp is dedicated for indoor use. It is used as a source of main light in representative rooms, hotels, restaurants, conference rooms. Unique design and energy-saving LED modules also dedicate the lamp for use in modern office buildings.



BARIS SQUARE 40 LED Z 1162X1162MM 10900LM PLX I KL. IP20 830 116W BLACK

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	938955
EAN:	5905963938955
Light source:	LED module
Rated power of the luminaire [W]:	116
Luminous flux [lm]:	10900
Supply voltage [V]:	220-240
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	95
Energy efficiency class:	F
Electrical protection class:	1
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
LED lifespan L70B50 [h]:	111500
LED lifespan L80B20 [h]:	70400
LED lifespan L90B10 [h]:	34000
Light distribution type:	open space
	•

Surge protection [kV]:	1
Diffuser material:	PC
Diffuser type:	OPAL
Diffuser colour:	milky
Material of the body:	aluminium
Colour of the body:	black
Dimensions (H/W/T/S) [mm]:	1162/1162/52
Mounting dimensions [mm]:	260/70
Impact resistance:	IK06
Ingress protection:	IP20
Mounting version:	suspended
Working temperature [°C]:	from -25 to +35
Warranty [years]:	5
CE certificate:	211/2023
Category type:	decorative fixtures
Plik LDT:	Download

Card creation date: 03 January 2025



