


TERRACO FRONT LED 1100LM PLX IP54 I CL. 840 17W WHITE

DETAILED CARD

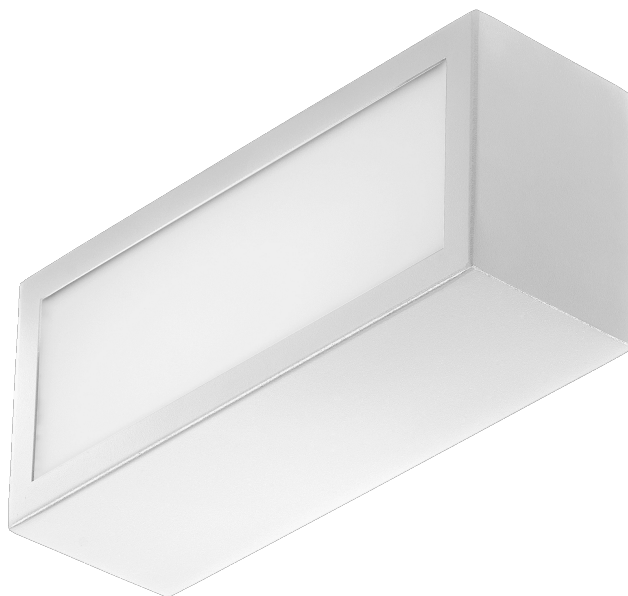

TECHNICAL PARAMETERS

Light source:	LED module
Rated power of the luminaire [W]*:	17
Luminous flux [lm]*:	1100
Energy efficiency class:	A
Electrical protection class:	I
Colour temperature [K]:	4000
Colour rendering index:	>80
Exchangeable source:	yes
Material of the body:	Steel
Impact resistance:	IK04

CHARACTERISTICS

Terraco LED is a modernistic lamp distinguished by its interesting minimalist design. The powder-coated steel body of the lamp is available in three color versions: silver, graphite, white and black. The multitude of versions with different luminous surfaces makes it possible to use it in numerous places and in different ways: vertically and horizontally. Mounted on the facade of a building, it can shine down, down and up, as well as sideways. It features a high IP54 waterproof rating. It is designed for surface mounting.

APPLICATION

The Terraco LED lamp will be particularly suitable as outdoor facade lighting, terrace lighting, and balcony lighting. Small dimensions increase the range of its applications - it can illuminate alcoves or hard-to-reach places. Terraco lamps can also be used in the interiors of buildings and arranged in a variety of ways on the wall to form interesting lighting arrangements. The lamp allows to realize a large number of interesting lighting concepts. It is used to illuminate contemporary architecture.


TERRACO FRONT LED 1100LM PLX IP54 I CL. 840 17W WHITE

DETAILED CARD

TECHNICAL PARAMETERS TABLE


Index:	995330	Light distribution type:	FRONT
EAN:	5905963995330	Exchangeable source:	yes
Light source:	LED module	Diffuser material:	PMMA
Rated power of the luminaire [W]:	17	Diffuser type:	MAT
Luminous flux [lm]:	1100	Diffuser colour:	white
AC voltage range [V]:	220 - 240	Material of the body:	Steel
Frequency [Hz]:	50-60	Colour of the body:	white
Luminous efficacy [lm/W]:	67	Dimensions (H/W/T/S) [mm]:	260/110/100
Energy efficiency class:	A	Impact resistance:	IK04
Electrical protection class:	I	Ingress protection:	IP54
Colour temperature [K]:	4000	Mounting version:	surface
Colour rendering index:	>80	Working temperature [°C]:	from -25 to +35
SDCM:	≤ 4	CE certificate:	184/2023
LED lifespan L70B50 [h]:	134000	Manual:	Download PDF
LED lifespan L80B20 [h]:	86000	Category type:	spotlight
LED lifespan L90B10 [h]:	46000	Plik LDT:	Download

LIGHT CURVES

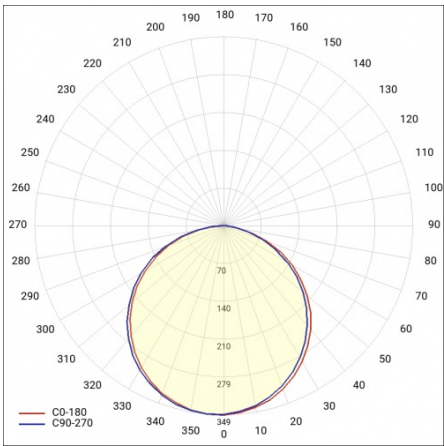

TERRACO FRONT LED 1100LM PLX IP54 I CL. 840 17W WHITE

DETAILED CARD
TECHNICAL DETAILS



Front

Card creation date: 30 April 2025
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 184/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl