


SQ 600 LED IOT PIR BT 3700LM PLX DALI I KL. 592X592MM 840 (37W)

DETAILED CARD

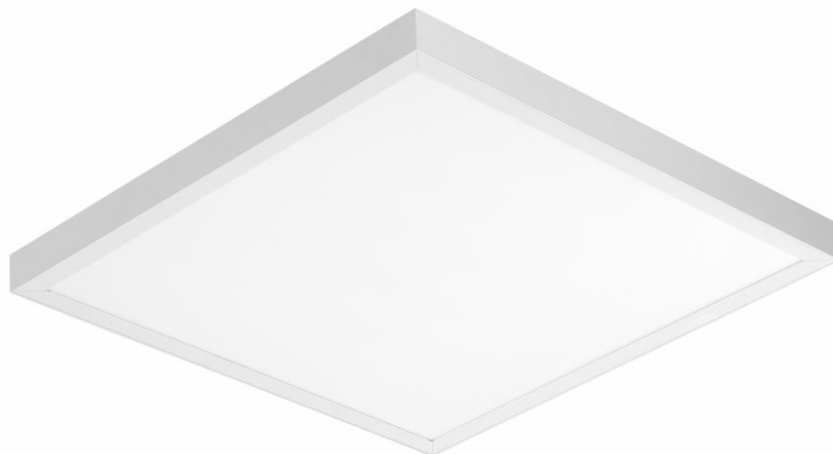

TECHNICAL PARAMETERS

Light source:	LED module
Nominal power [W]:	37
Luminous flux [lm]*:	3700
Supply voltage [V]:	220-240
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	87
Energy efficiency class:	F
Electrical protection class:	I
Colour temperature [K]:	4000
Diffuser colour:	white

CHARACTERISTICS

SQ 600 LED is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

The luminaire is available in 2 versions:

- with OPAL diffuser - providing soft light;
- with PRM diffuser - with higher luminous efficiency and low glare UGR <19 (18W, 24W, 32W versions).

Available options:

- RCR sensor - sensor used for motion detection, without twilight detection option; uses microwaves for detection (active sensor),
- control in the DALI standard,
- CORRIDOR corridor function (RCR + DALI).

The ingress protection- depends on the method of installation:

- surface mounted - IP20,
- flush-mounted - IP44/20.

APPLICATION

Surface-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


SQ 600 LED IOT PIR BT 3700LM PLX DALI I KL. 592X592MM 840 (37W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	670527	Light distribution type:	open space
Light source:	LED module	Diffuser material:	PS
Nominal power [W]:	37	Diffuser type:	OPAL
Luminous flux [lm]:	3700	Diffuser colour:	white
Supply voltage [V]:	220-240	Optics:	lens
Frequency [Hz]:	50-60	Optics material:	PMMA
Luminous efficacy [lm/W]:	87	Material of the body:	ABS
Energy efficiency class:	F	Dimensions (H/W/T/S) [mm]:	592/592/44
Electrical protection class:	I	Ingress protection:	IP44/IP20
Colour temperature [K]:	4000	Mounting version:	surface mounted; recessed mounted in modular ceiling possible
Colour rendering index:	>80	Motion sensor:	yes
LED lifespan L70B50 [h]:	50000	DIMM DALI:	yes
LED lifespan L80B20 [h]:	32000	Warranty [years]:	5
LED lifespan L90B10 [h]:	15000	Category type:	louvres
Beam angle [°]:	120	CE certificate:	442/2023

LIGHT CURVES

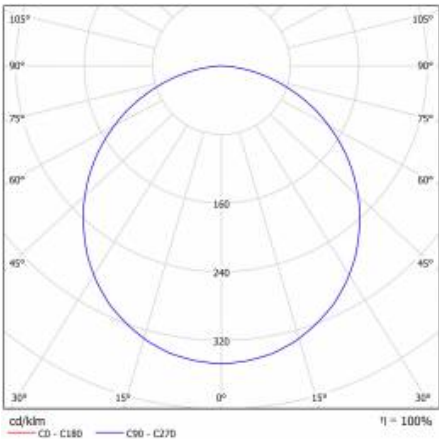

SQ 600 LED IOT PIR BT 3700LM PLX DALI I KL. 592X592MM 840 (37W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white
978395	Installation kit SQ 600 Ceiling system H40 100x100



Plasterboard recessing kit 630x630 white (999543)

Card creation date: 20 September 2022
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 442/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl