

# SQ 600 LED IOT BT 6350LM PRM RCR I KL. 592X592MM 830 (52W)

DETAILED CARD



## TECHNICAL PARAMETERS

Light source:	LED module
Nominal power [W]:	52
Luminous flux [lm]*:	6350
Supply voltage [V]:	220-240
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	120
Energy efficiency class:	D
Electrical protection class:	I
Colour temperature [K]:	3000
Diffuser colour:	transparent

## CHARACTERISTICS

SQ 600 LED is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

The luminaire is available in 2 versions:

- with OPAL diffuser - providing soft light;
- with PRM diffuser - with higher luminous efficiency and low glare UGR <19 (18W, 24W, 32W versions).

Available options:

- RCR sensor - sensor used for motion detection, without twilight detection option; uses microwaves for detection (active sensor),
- control in the DALI standard,
- CORRIDOR corridor function (RCR + DALI).

The ingress protection- depends on the method of installation:

- surface mounted - IP20,
- flush-mounted - IP44/20.

## APPLICATION

Surface-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


# SQ 600 LED IOT BT 6350LM PRM RCR I KL. 592X592MM 830 (52W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	670961	<b>Beam angle [°]:</b>	120
<b>Light source:</b>	LED module	<b>Light distribution type:</b>	open space
<b>Nominal power [W]:</b>	52	<b>Diffuser material:</b>	PS
<b>Luminous flux [lm]:</b>	6350	<b>Diffuser type:</b>	PRM
<b>Supply voltage [V]:</b>	220-240	<b>Diffuser colour:</b>	transparent
<b>Frequency [Hz]:</b>	50-60	<b>Material of the body:</b>	ABS
<b>Luminous efficacy [lm/W]:</b>	120	<b>Dimensions (H/W/T/S) [mm]:</b>	592/592/44
<b>Energy efficiency class:</b>	D	<b>Ingress protection:</b>	IP44/IP20
<b>Electrical protection class:</b>	I	<b>Mounting version:</b>	surface mounted; recessed mounted in modular ceiling possible
<b>Colour temperature [K]:</b>	3000	<b>Motion sensor:</b>	yes
<b>Colour rendering index:</b>	>80	<b>Warranty [years]:</b>	5
<b>LED lifespan L70B50 [h]:</b>	132000	<b>Category type:</b>	louvres
<b>LED lifespan L80B20 [h]:</b>	84000	<b>CE certificate:</b>	<a href="#">442/2023</a>
<b>LED lifespan L90B10 [h]:</b>	42000		

## LIGHT CURVES

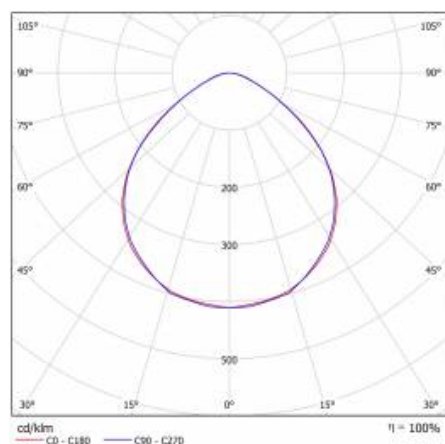

# SQ 600 LED IOT BT 6350LM PRM RCR I KL. 592X592MM 830 (52W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white
978395	Installation kit SQ 600 Ceiling system H40 100x100



Plasterboard recessing kit 630x630  
white (999543)

Card creation date: 20 September 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 442/2023