


# BARIS 52 LED DIR/IND IOT BT PIR HYT 1423MM 4550/2775LM 840 IP40 I CL. DALI PRM WHITE 36W/22W SINGLE SENSOR WITH INCL.

DETAILED CARD



## TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK06
Nominal power [W]:	58
Luminous flux [lm]*:	7325
Colour temperature [K]:	4000
Material of the body:	aluminium
Colour of the body:	white
Diffuser material:	PC
Diffuser type:	PRM
Mounting version:	suspended

## CHARACTERISTICS

Baris 52 LED IoT is a modern suspended lamp that combines elegant design with advanced technology. The modular design makes it easy to service and the unique suspension system ensures simple installation. Available with mounting box or optional plug-in socket.

**IoT characteristics** The IoT BT PIR HYT DALI version has: a built-in BT HYT module that allows you to program functions in the Lena Lighting Clue app and control in real time; PIR motion and daylight sensor and DALI driver for dimming the light source.

## APPLICATION

The luminaire is dedicated to indoor use. It is used as a source of light for offices requiring focussed eyesight where low UGR and illumination of dark areas (e.g. ceilings) are required. The unique design, energy-efficient LED modules, and the possibility of cooperation with external lighting control systems in the DALI standard dedicate the luminaire to be used in modern office buildings of A+ class, with particular consideration for offices, representative rooms, conference halls, and passageways.

Baris 52 LED Single Clue IoT, as the name suggests, is a single luminaire with a pre-determined length. To create a line of length up to 6 meters without joining the profile and up to 25 meters without joining the diffuser allows version BARIS 52 LED.

# BARIS 52 LED DIR/IND IOT BT PIR HYT 1423MM 4550/2775LM 840 IP40 I CL. DALI PRM WHITE 36W/22W SINGLE SENSOR WITH INCL.

DETAILED CARD


## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	932397	<b>Material of the body:</b>	aluminium
<b>EAN:</b>	5905963932397	<b>Colour of the body:</b>	white
<b>Light source:</b>	LED module	<b>Dimensions (H/W/T/S) [mm]:</b>	1423/69/52
<b>Rated power of the luminaire [W]:</b>	58	<b>Impact resistance:</b>	IK06
<b>Luminous flux [lm]:</b>	7325	<b>Ingress protection:</b>	IP40
<b>Supply voltage [V]:</b>	220-240	<b>Mounting version:</b>	suspended
<b>Frequency [Hz]:</b>	50-60	<b>Working temperature [°C]:</b>	from -25 to +35
<b>Luminous efficacy [lm/W]:</b>	126	<b>DIMM DALI:</b>	yes
<b>Energy efficiency class:</b>	D	<b>Version:</b>	BT PIR HYT DALI
<b>Electrical protection class:</b>	I	<b>Wire type:</b>	5x0.75
<b>Colour temperature [K]:</b>	4000	<b>Cable length [m]:</b>	1.50
<b>Color rendering index (Ra) &gt;:</b>	80	<b>Net weight [kg]:</b>	2.800
<b>SDCM:</b>	3	<b>UGR (4H8H):</b>	19
<b>LED lifespan L70B50 [h]:</b>	150000	<b>Warranty [years]:</b>	5
<b>LED lifespan L80B10 [h]:</b>	100000	<b>CE certificate:</b>	<a href="#">40/2026</a>
<b>LED lifespan L90B10 [h]:</b>	50000	<b>PZH certificate:</b>	<a href="#">B-BK-60112-0357/2023</a>
<b>Diffuser material:</b>	PC	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Diffuser type:</b>	PRM	<b>Environmental Product Declaration (EPD):</b>	<a href="#">852/2025</a>
<b>Diffuser colour:</b>	transparent	<b>Category of application:</b>	office lighting
<b>Optics:</b>	no	<b>ISO Certificates:</b>	9001:2015, 14001:2015, 45001:2018, 50001:2018

# BARIS 52 LED DIR/IND IOT BT PIR HYT 1423MM 4550/2775LM 840 IP40 I CL. DALI PRM WHITE 36W/22W SINGLE SENSOR WITH INCL.

## TECHNICAL PICTURES

### DETAILED CARD

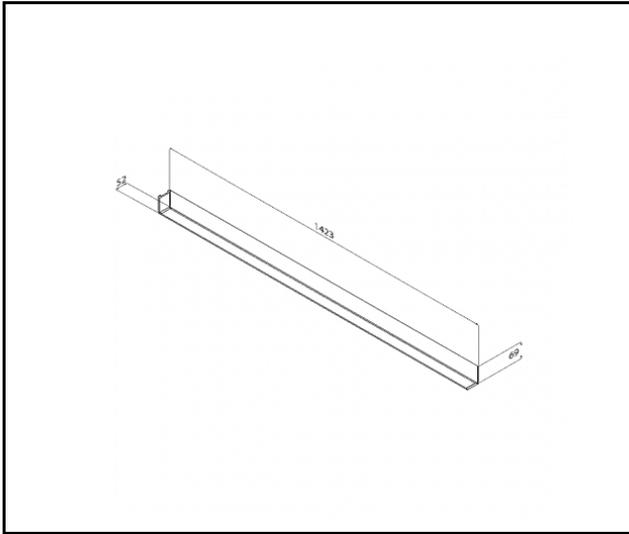

Card creation date: 17 March 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 40/2026