


# TERRANO S 1140X48MM 5400LM 830 I KL. BLACK 60D (56W)

DETAILED CARD

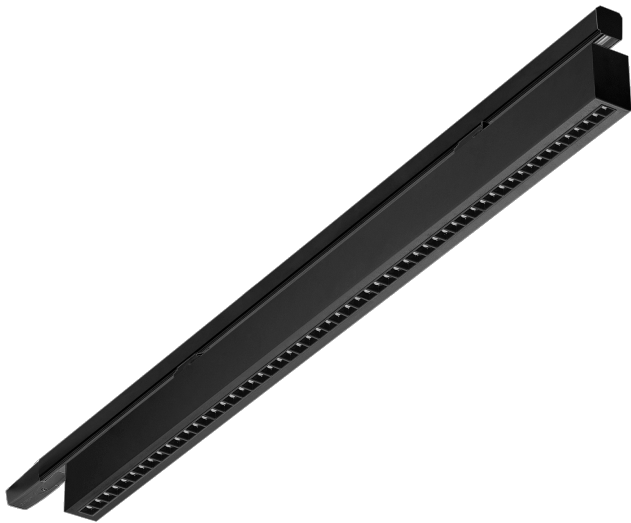

## TECHNICAL PARAMETERS

Index:	x
Luminous flux [lm]*:	max 6360
Energy efficiency class:	D; E
Electrical protection class:	I
Colour temperature [K]:	3000; 3500; 4000
Beam angle [°]:	55; 60

## CHARACTERISTICS

The new Terrano S linear luminaire, thanks to the use of the latest generation of LED modules, is characterized by energy efficiency and excellent technical parameters. Equipped with focusing lenses, Terrano S lamps are sight-friendly and effectively reduce glare (UGR of 12-19). Mounted in a busbar system, they are available in two color temperatures of 3000 K and 4000 K and two color versions: white and black.

## APPLICATION

Mounting on a rail system, increases the range of applications of this lamp and allows the user to make rearrangements, even after installation. The lamp has an adapter equipped with mechanical catches that make it easy to plug in, unplug and move the lamps, while ensuring that the fixture is securely held in the rail. The lamps, together with appropriately selected rails and components, allow for ceiling or wall mounting. The Terrano S lamp is perfect as a source of light in offices, stores, dressing rooms, in passageways.

# TERRANO S 1140X48MM 5400LM 830 I KL. BLACK 60D (56W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	x	Optics:	soczewka
EAN:	x	Optics material:	PC
Light source:	moduł LED	Material of the body:	blacha stalowa malowana proszkowo
Luminous flux [lm]:	max 6360	Colour of the body:	biały; czarny
Energy efficiency class:	D; E	Dimensions (H/W/T/S) [mm]:	48/1115/73; 48/1117/69; 48/566/69
Electrical protection class:	I	Ingress protection:	IP20
Colour temperature [K]:	3000; 3500; 4000	Mounting version:	do szynoprzewodu
Colour rendering index:	>80; >90	Working temperature [°C]:	od -10 do +35
SDCM:	≤ 3	Net weight [kg]:	1.120; 1.760
Beam angle [°]:	55; 60	CE certificate:	<a href="#">06/2023; 303/2023</a>
Light distribution type:	symetryczny	Manual:	<a href="#">Download PDF</a>
Diffuser material:	PC	Category type:	louvres
Diffuser type:	matryca soczewkowa	Warranty [years]:	5
Diffuser colour:	transparentny		

## LIGHT CURVES



Card creation date:19 June 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 303/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)