


# BARIS 52 LED N/Z CONNECTOR V 125ST 2100LM PLX I CL. IP20 840 BLACK (17W)

DETAILED CARD

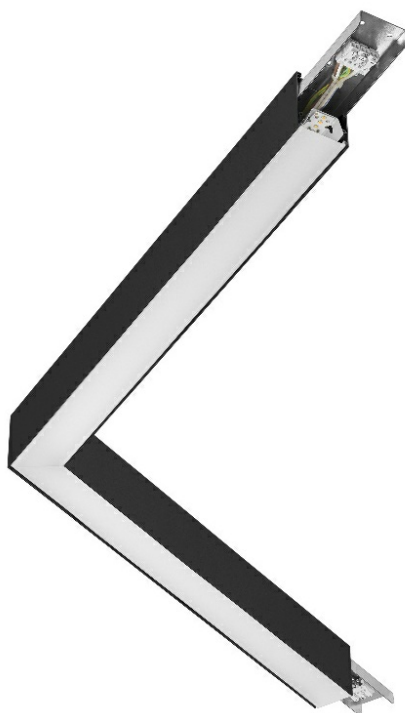

## TECHNICAL PARAMETERS

<b>Rated power of the luminaire [W]*:</b>	17
<b>Luminous flux [lm]*:</b>	2100
<b>Colour temperature [K]:</b>	4000
<b>Energy efficiency class:</b>	D
<b>Electrical protection class:</b>	I
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 3
<b>Material of the body:</b>	aluminium

## CHARACTERISTICS

The key feature of L, T, X, V connectors is that they are equipped with integrated electronics and a diffuser, thanks to which the profile route bends remain illuminated along the entire length. Body is made of anodized aluminium profile in grey or aluminium profile painted white or black (other colors available on request). The optical system is complemented by a dedicated, flexible opal cover that evenly illuminates the connector. There is no division into surface mounted and suspended versions, which make the solution more universal.

Connectors (T, X, L, V) are supplied with an OPAL diffuser.

Connectors T, X, L, V UGR, and PRM diffusers are available on request.

## APPLICATION

BARIS 52 LED connectors in the shape of the letter L, T, X, V and straight connectors create extraordinary opportunities to configure the light line matched to the character and shape of the room, allowing you to create virtually unlimited straight sequences, figures and patterns.

# BARIS 52 LED N/Z CONNECTOR V 125ST 2100LM PLX I CL. IP20 840 BLACK (17W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE


<b>Index:</b>	677328	<b>Diffuser type:</b>	OPAL
<b>Light source:</b>	LED module	<b>Material of the body:</b>	aluminium
<b>Rated power of the luminaire [W]:</b>	17	<b>Colour of the body:</b>	black
<b>Luminous flux [lm]:</b>	2100	<b>Ingress protection:</b>	IP20
<b>Frequency [Hz]:</b>	50-60	<b>Mounting version:</b>	zwieszany/natynk
<b>Luminous efficacy [lm/W]:</b>	124	<b>Net weight [kg]:</b>	2.160
<b>Energy efficiency class:</b>	D	<b>Through wiring:</b>	TAK
<b>Electrical protection class:</b>	I	<b>Product line:</b>	V 125°
<b>Colour temperature [K]:</b>	4000	<b>Optics:</b>	no
<b>Colour rendering index:</b>	>80	<b>Dimensions (H/W/T/S) [mm]:</b>	903/500/52
<b>SDCM:</b>	≤ 3	<b>Warranty [years]:</b>	5
<b>LED lifespan L70B50 [h]:</b>	112000	<b>CE certificate:</b>	<a href="#">342/2023</a>
<b>LED lifespan L80B20 [h]:</b>	70 000	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>LED lifespan L90B10 [h]:</b>	34000	<b>Plik LDT:</b>	<a href="#">Download</a>
<b>Diffuser material:</b>	PC		

# BARIS 52 LED N/Z CONNECTOR V 125ST 2100LM PLX I CL. IP20 840 BLACK (17W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
318023	Baris 52 - linear connector. straight



Baris 52 - linear connector.  
straight (318023)

Card creation date: 28 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 342/2023