
## TRIO 3X RQ 220 LED P 2650LM 830 IP65/IP20 I CL. PRM 23W

**DETAILED CARD** 



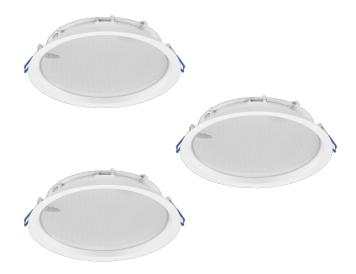

## **TECHNICAL PARAMETERS**

Rated power of the luminaire [W]*: 23	
Luminous flux [lm]*: 2650	)
Luminous efficacy [lm/W]: 116	
Energy efficiency class: D	
Electrical protection class:	
Colour temperature [K]: 3000	)
<b>Diffuser material:</b> PC	
Diffuser type: PRM	
Material of the body: ABS	
Colour of the body: white	è

## **CHARACTERISTICS**

RQ 220 LED P is a new line of round downlights. Designed from the ground up, the design introduces new solutions to ensure excellent light performance. The body is made of plastic, so it is characterized by low weight. The diffuser provides the lamp with excellent light characteristics. Integrated LED module Provides low electricity consumption and all the advantages of modern lamps with LED source for investment lighting.

## **APPLICATION**

Designed from scratch, the design introduces new solutions to ensure excellent light performance. The body is made of plastic, so it is characterized by low weight. The lampshade provides the lamp with excellent light characteristics. Integrated LED module Provides low electricity consumption and all the advantages of modern lamps with LED source for investment lighting.

The lamp is especially recommended for office spaces, spacious corridors and public spaces.



# TRIO 3X RQ 220 LED P 2650LM 830 IP65/IP20 I CL. PRM 23W

**DETAILED CARD** 

## **TECHNICAL PARAMETERS TABLE**

Index:	979569
EAN:	5905963979569
Light source:	LED module
Rated power of the luminaire [W]:	23
Luminous flux [Im]:	2650
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	116
Energy efficiency class:	D
Electrical protection class:	1
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
Beam angle [°]:	110
Diffuser material:	PC
Diffuser type:	PRM
Material of the body:	ABS
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	221/221/51

Mounting dimensions [mm]:	200
Impact resistance:	IK07
Ingress protection:	IP65/IP20
Mounting version:	recessed
Working temperature [°C]:	from 0 to +35
Number on the palette [pcs]:	28
Net weight [kg]:	1.400
Category type:	downlights
LED lifespan L80B20 [h]:	58000
LED lifespan L70B50 [h]:	92000
LED lifespan L90B10 [h]:	28000
Version:	Trio (3 pieces)
Warranty [years]:	5
CE certificate:	300/2023
HACCP:	<u>852/2004</u>
Manual:	Download PDF
Plik LDT:	Download

Card creation date: 09 January 2025



