

TRIO 3X RQ 220 LED PLUS P 2700LM DALI 830 IP65/IP20 I CL. MAT 24W

DETAILED CARD



TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	24
Luminous flux [lm]*:	2700
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	113
Energy efficiency class:	E
Electrical protection class:	I
Colour temperature [K]:	3000
Beam angle [°]:	110
Diffuser material:	PC
Diffuser type:	OPAL

CHARACTERISTICS

RQ 220 LED P PLUS is a new line of round downlights. Designed from the ground up, the design introduces new solutions to ensure excellent light performance. The body is made of plastic, so it is characterized by low weight. The diffuser provides the lamp with excellent light characteristics. Integrated LED module Provides low electricity consumption and all the advantages of modern lamps with LED source for investment lighting.

APPLICATION

Designed from scratch, the design introduces new solutions to ensure excellent light performance. The body is made of plastic, so it is characterized by low weight. The lampshade provides the lamp with excellent light characteristics. Integrated LED module Provides low electricity consumption and all the advantages of modern lamps with LED source for investment lighting.

The lamp is especially recommended for office spaces, spacious corridors and public spaces.


TRIO 3X RQ 220 LED PLUS P 2700LM DALI 830 IP65/IP20 I CL. MAT 24W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	947759	Dimensions (H/W/T/S) [mm]:	221/221/51
EAN:	5905963947759	Version:	Trio (3 pieces)
Light source:	LED module	Mounting dimensions [mm]:	200
Rated power of the luminaire [W]:	24	Impact resistance:	IK07
Luminous flux [lm]:	2700	Ingress protection:	IP65/IP20
Supply voltage [V]:	220-240	Mounting version:	recessed
Frequency [Hz]:	50-60	Working temperature [°C]:	from 0 to +35
Luminous efficacy [lm/W]:	113	Number on the palette [pcs]:	28
Energy efficiency class:	E	Net weight [kg]:	1.450
Electrical protection class:	I	Product line:	Trio
Colour temperature [K]:	3000	Category type:	downlights
Colour rendering index:	>80	LED lifespan L70B50 [h]:	132000
Beam angle [°]:	110	LED lifespan L80B20 [h]:	84000
Light distribution type:	lamertian	LED lifespan L90B10 [h]:	42000
Diffuser material:	PC	Warranty [years]:	5
Diffuser type:	OPAL	CE certificate:	302/2023
Material of the body:	ABS	HACCP:	852/2004
DIMM DALI:	yes	Manual:	Download PDF
Colour of the body:	white	Plik LDT:	Download

LIGHT CURVES

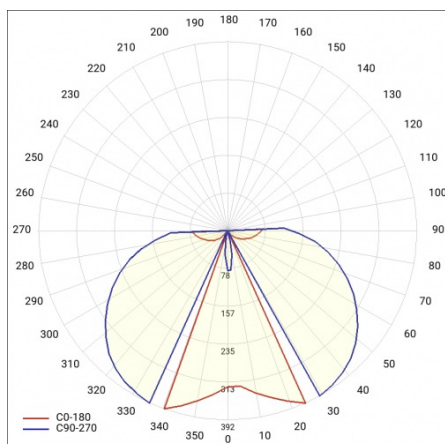

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 302/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl