
## TRIO 3X RQ 220 LED PLUS P 2850LM DALI 840 IP65/IP20 I CL. PRM 20W

**DETAILED CARD** 



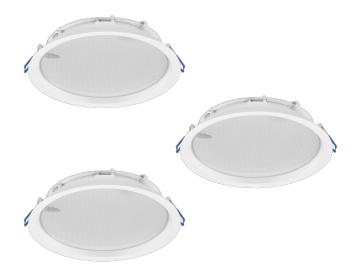

## **TECHNICAL PARAMETERS**

Rated power of the luminaire [W]*:	20
Luminous flux [lm]*:	2850
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	143
Energy efficiency class:	С
Electrical protection class:	1
Colour temperature [K]:	4000
Beam angle [°]:	110
Diffuser material:	PC
Diffuser type:	PRM

#### **CHARACTERISTICS**

RQ 220 LED P PLUS is a new line of round downlights. Designed from the ground up, the design introduces new solutions to ensure excellent light performance. The body is made of plastic, so it is characterized by low weight. The diffuser provides the lamp with excellent light characteristics. Integrated LED module Provides low electricity consumption and all the advantages of modern lamps with LED source for investment lighting.

## **APPLICATION**

Designed from scratch, the design introduces new solutions to ensure excellent light performance. The body is made of plastic, so it is characterized by low weight. The lampshade provides the lamp with excellent light characteristics. Integrated LED module Provides low electricity consumption and all the advantages of modern lamps with LED source for investment lighting.

The lamp is especially recommended for office spaces, spacious corridors and public spaces.



# TRIO 3X RQ 220 LED PLUS P 2850LM DALI 840 IP65/IP20 I CL. PRM 20W

**DETAILED CARD** 

#### **TECHNICAL PARAMETERS TABLE**

Index:	983184
EAN:	5905963983184
Light source:	LED module
Rated power of the luminaire [W]:	20
Luminous flux [Im]:	2850
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	143
Energy efficiency class:	С
Electrical protection class:	1
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Beam angle [°]:	110
Light distribution type:	lambertian
Diffuser material:	PC
Diffuser type:	PRM
Material of the body:	ABS
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	221/221/51
Mounting dimensions [mm]:	200

Impact resistance:	IK07
Ingress protection:	IP65/IP20
Mounting version:	recessed
Working temperature [°C]:	from 0 to +35
Number on the palette [pcs]:	28
Net weight [kg]:	28
Product line:	Trio
DIMM DALI:	yes
Category type:	downlights
Gross weight [kg]:	1.450
LED lifespan L70B50 [h]:	132000
LED lifespan L80B20 [h]:	84000
LED lifespan L90B10 [h]:	42000
Version:	Trio (3 pieces)
Warranty [years]:	5
CE certificate:	302/2023
HACCP:	<u>852/2004</u>
Manual:	Download PDF
Plik LDT:	Download

Card creation date: 09 January 2025



