

# MIRRA LED IP44 20W 900MM 4000K

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	703171
<b>Ingress protection:</b>	IP44
<b>Nominal power [W]:</b>	20
<b>Luminous flux [lm]*:</b>	1600
<b>Colour temperature [K]:</b>	4000
<b>Colour rendering index:</b>	>80
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	F
<b>Diffuser type:</b>	OPAL
<b>Mounting version:</b>	surface, wall mounted

## CHARACTERISTICS

Versatile LED luminaire intended for indoor use in rooms with increased humidity. It is widely used in office and commercial facilities, in particular, bathrooms and toilets. Body made of PC. White and grey end caps included.

## APPLICATION

The luminaire is suitable for rooms that require increased ingress protection (IP44) such as toilets and bathrooms in public facilities; schools, public offices; shopping malls, office buildings and industrial buildings.


# MIRRA LED IP44 20W 900MM 4000K

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Dimensions (H/W/T/S) [mm]:	52/69/900
Nominal power [W]:	20	Ingress protection:	IP44
Rated power of the luminaire [W]:	20	Mounting version:	surface, wall mounted
Supply voltage [V]:	220-240	Working temperature [°C]:	from -10 to +35
Frequency [Hz]:	50 - 60	Net weight [kg]:	0.500
Luminous flux [lm]:	1600	CE certificate:	<a href="#">35/2018</a>
Luminous efficacy [lm/W]:	80	Index:	703171
Energy efficiency class:	F	EAN:	5905963703171
Electrical protection class:	II	Category type:	battens
Colour temperature [K]:	4000	Switch:	yes
Colour rendering index:	>80	ETIM class:	EC000109
Power factor:	0.50	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser material:	PC	Warranty [years]:	2
Diffuser type:	OPAL	LED lifespan L70B50 [h]:	50000
Diffuser colour:	white	LED lifespan L80B20 [h]:	32000
Optics material:	PC	LED lifespan L90B10 [h]:	15000
Material of the body:	PC	Manual:	<a href="#">Download PDF</a>
Colour of the body:	white		

## LIGHT CURVES

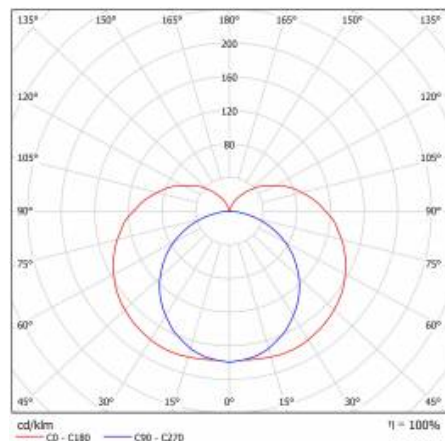


# MIRRA LED IP44 20W 900MM 4000K

DETAILED CARD

## TECHNICAL DETAILS



mirra led detal 1



mirra led detal 2

Card creation date: 19 April 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 35/2018