

# QUEST 2 LED RESIST L ASN 19350LM I KL. IP66 840 SP10KV (145W)

## DETAILED CARD



## TECHNICAL PARAMETERS

Ingress protection:	IP66
Impact resistance:	IK09
Luminous flux [lm]*:	19350
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Electrical protection class:	I
Energy efficiency class:	D
Material of the body:	aluminium
Colour of the body:	anthracite grey

## CHARACTERISTICS

High quality floodlight with integrated LED source. The body is made of die-cast aluminum, powder coated in anthracite gray (RAL 7016) and the mounting bracket is made of black painted steel. The diffuser is tempered glass with a thickness of 5mm. Mounting bracket, corrosion-resistant, with adjustable angle from -140° to +185°. Standard equipped with H07RN-F cable and IP66 quick-connector.

## APPLICATION

Dedicated for use in swimming pools. Lighting of educational and administrative facilities, halls, garages, passageways, warehouses, stores, food industry and food commodity-related commercial and service facilities.


# QUEST 2 LED RESIST L ASN 19350LM I KL. IP66 840 SP10KV (145W)

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	695292	Dimensions (H/W/T/S) [mm]:	415/424/37
Light source:	LED module	Impact resistance:	IK09
Rated power of the luminaire [W]:	145	Ingress protection:	IP66
Supply voltage [V]:	220 - 240	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	19350	Lateral surface (SCx) [m2]:	0.140
Luminous efficacy [lm/W]:	133	Cable length [m]:	0.90
Energy efficiency class:	D	Number on the palette [pcs]:	60
Electrical protection class:	I	Net weight [kg]:	4.200
Colour temperature [K]:	4000	Category type:	floodlights
Color rendering index (Ra) >:	80	Version:	L
SDCM:	3	LED lifespan L70B50 [h]:	125000
Light colour:	biały	LED lifespan L80B20 [h]:	79000
Surge protection [kV]:	10	LED lifespan L90B10 [h]:	38000
Diffuser material:	glass	Light distribution type:	asymmetric ASN
Diffuser type:	transparent	Warranty [years]:	5
Optics material:	PC	CE certificate:	<a href="#">296/2023</a>
Optics:	lens	Environmental Product Declaration (EPD):	<a href="#">816/2025</a>
Material of the body:	aluminium	Manual:	<a href="#">Download PDF</a>
Colour of the body:	anthracite grey	Plik LDT:	<a href="#">Download</a>

### LIGHT CURVES

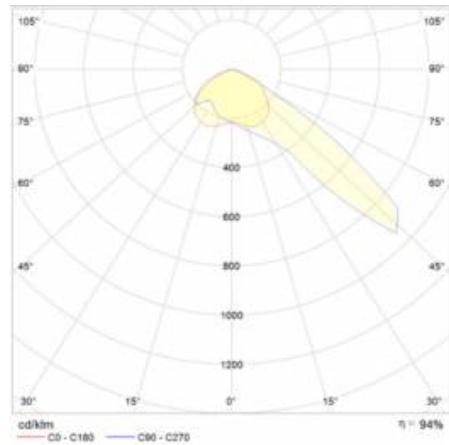


# QUEST 2 LED RESIST L ASN 19350LM I KL. IP66 840 SP10KV (145W)

## DETAILED CARD

### ACCESSORIES AVAILABLE

index	Name
559938	QUEST PLUS LED M/L wall holder RAL9006
699993	QUEST 2 LED M - recessed frame
699986	QUEST 2 LED L - recessed frame
699962	QUEST 2 LED L protective grid RAL7016
699979	QUEST 2 LED M protective grid RAL7016
965913	QUEST 2 LED M/L MAX wall mount RAL7016
567728	QUEST 2 LED M/L Pole holder




QUEST PLUS LED M/L wall holder  
RAL9006 (559938)




QUEST 2 LED M - recessed  
frame (699993)




QUEST 2 LED L - recessed  
frame (699986)




QUEST 2 LED L protective grid  
RAL7016 (699962)



QUEST 2 LED M protective grid  
RAL7016 (699979)



QUEST 2 LED M/L MAX wall mount  
RAL7016 (965913)



QUEST 2 LED M/L Pole  
holder (567728)

Card creation date: 10 July 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).  Certificate CE - Nr: 296/2023