

# MESSAGGIO 1541 MM 3400 LM 827 IP20 I CL. DALI 64 W BLACK

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	578090
<b>Light source:</b>	LED module
<b>Rated power [W] - range:</b>	64
<b>Luminous flux of the luminaire [lm] - range:</b>	3400
<b>Supply voltage [V]:</b>	220 - 240
<b>Frequency [Hz]:</b>	50 - 60
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	2700
<b>Ingress protection:</b>	IP20
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

The Messaggio collection, designed by Dorota Koziara, includes pendant lamps with a minimalist form. They can come in all RAL colors, including a multicolor version, where the outside of the housing and the inside of the lamp have different colors. In this way, Messaggio provides unlimited design possibilities.

Thanks to the possibility of adjusting the length of the pendants from the Messaggio lamps, surprising light compositions can be created. Versions with DALI control allow you to change the value of the light output, which further enhances the decorative effect. The milky lampshade is made of PC, while the housing is made of solid yet visually delicate steel, which ensures the durability of the product.

## APPLICATION

Messaggio is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.


# MESSAGGIO 1541 MM 3400 LM 827 IP20 I CL. DALI 64 W BLACK

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	578090	<b>Colour of the body:</b>	black
<b>Rated power [W] - range:</b>	64	<b>Diffuser colour:</b>	milky
<b>EAN:</b>	5905963578090	<b>Material of the body:</b>	Steel
<b>Luminous flux of the luminaire [lm] - range:</b>	3400	<b>Dimensions (H/W/T/S) [mm]:</b>	1230/1541/80
<b>Light source:</b>	LED module	<b>Mounting dimensions [mm]:</b>	340
<b>Supply voltage [V]:</b>	220 - 240	<b>Ingress protection:</b>	IP20
<b>Frequency [Hz]:</b>	50 - 60	<b>Mounting version:</b>	suspended
<b>Colour temperature [K]:</b>	2700	<b>Working temperature [°C]:</b>	from -25 to +35
<b>Luminous efficacy [lm/W]:</b>	53	<b>DIMM DALI:</b>	yes
<b>Electrical protection class:</b>	I	<b>Diode PCB material:</b>	aluminium
<b>SDCM:</b>	≤ 3	<b>Control:</b>	yes
<b>LED lifespan L70B50 [h]:</b>	99000	<b>Net weight [kg]:</b>	4.870
<b>LED lifespan L80B20 [h]:</b>	63000	<b>Warranty [years]:</b>	5
<b>LED lifespan L90B10 [h]:</b>	31000	<b>Category type:</b>	architectural
<b>Beam angle [°]:</b>	116 x 58	<b>CE certificate:</b>	<a href="#">207/2023</a>
<b>Light distribution type:</b>	open space	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Diffuser material:</b>	PC	<b>Plik LDT:</b>	<a href="#">Download</a>
<b>Diffuser type:</b>	OPAL		

## LIGHT CURVES

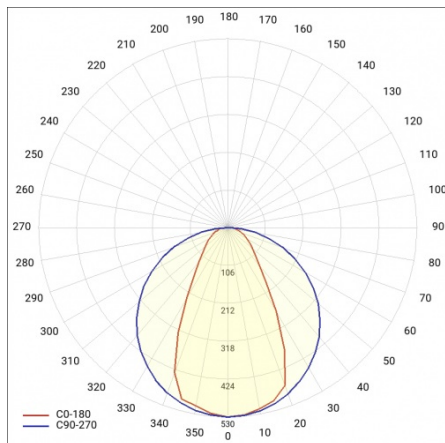

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 207/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl