


# MESSAGGIO 1261 MM 3300 - 5400 LM 830 IP20 I CL. 33 - 57 W WHITE

DETAILED CARD

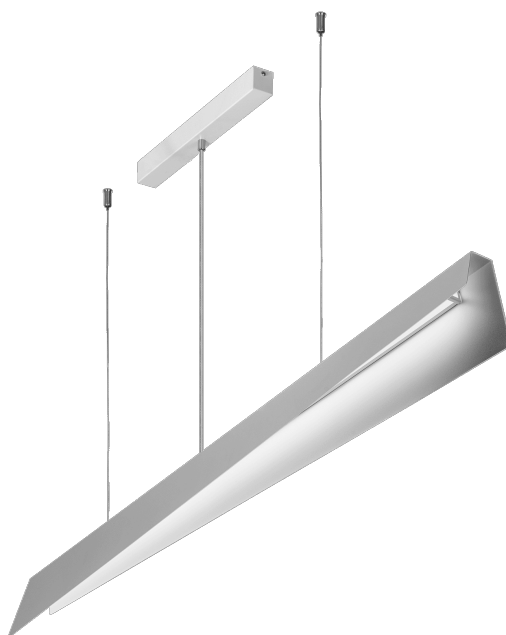

## TECHNICAL PARAMETERS

<b>Index:</b>	575563
<b>Light source:</b>	LED module
<b>Rated power [W] - range:</b>	33 - 57
<b>Luminous flux of the luminaire [lm] - range:</b>	3300 - 5400
<b>Supply voltage [V]:</b>	220 - 240
<b>Frequency [Hz]:</b>	50 - 60
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	3000
<b>Ingress protection:</b>	IP20
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

The Messaggio collection, designed by Dorota Koziara, includes pendant lamps with a minimalist form. They can come in all RAL colors, including a multicolor version, where the outside of the housing and the inside of the lamp have different colors. In this way, Messaggio provides unlimited design possibilities.

Thanks to the possibility of adjusting the length of the pendants from the Messaggio lamps, surprising light compositions can be created. Versions with DALI control allow you to change the value of the light output, which further enhances the decorative effect. The milky lampshade is made of PC, while the housing is made of solid yet visually delicate steel, which ensures the durability of the product.

## APPLICATION

Messaggio is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.


# MESSAGGIO 1261 MM 3300 - 5400 LM 830 IP20 I CL. 33 - 57 W WHITE

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	575563	Diffuser type:	OPAL
Rated power [W] - range:	33 - 57	Colour of the body:	white
EAN:	5905963575563	Diffuser colour:	milky
Luminous flux of the luminaire [lm] - range:	3300 - 5400	Material of the body:	Steel
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	1230/1261/80
Supply voltage [V]:	220 - 240	Mounting dimensions [mm]:	340
Frequency [Hz]:	50 - 60	Ingress protection:	IP20
Colour temperature [K]:	3000	Mounting version:	suspended
Luminous efficacy [lm/W]:	95	Working temperature [°C]:	from -25 to +35
Electrical protection class:	I	Diode PCB material:	aluminium
SDCM:	≤ 3	Net weight [kg]:	3.800
LED lifespan L70B50 [h]:	99000	Warranty [years]:	5
LED lifespan L80B20 [h]:	63000	Category type:	architectural
LED lifespan L90B10 [h]:	31000	CE certificate:	<a href="#">207/2023</a>
Beam angle [°]:	116 x 58	Manual:	<a href="#">Download PDF</a>
Light distribution type:	open space	Plik LDT:	<a href="#">Download</a>
Diffuser material:	PC		

## LIGHT CURVES

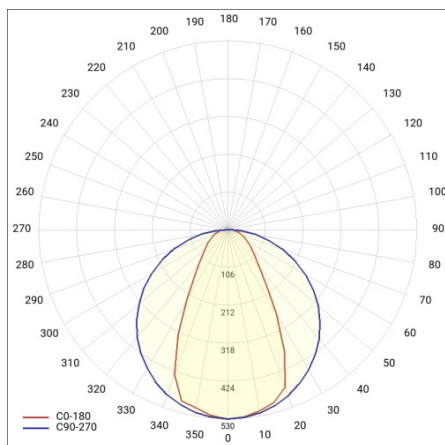

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 207/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)