

# MESSAGGIO BRACKET 701 MM 1900 LM 830 IP20 I CL. 18 W WHITE

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Rated power [W] - range:</b>	18
<b>Luminous flux of the luminaire [lm] - range:</b>	1900
<b>Luminous efficacy [lm/W]:</b>	106
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	3000
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

Wall lamps from the Messaggio collection, available in a variety of colors and sizes, can create spectacular light and decorative compositions, designed according to the architect's individual concepts. The LED modules used in the lamps ensure a high level of energy efficiency. The steel, solid, yet visually delicate housing can be painted in the interior and exterior parts in two different RAL colors. The milky lampshade is made of impact-resistant polycarbonate.

Messaggio wall lamps also come in a version with DALI control, which allows you to adjust the value of the luminous flux.

## APPLICATION

Messaggio is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.


# MESSAGGIO BRACKET 701 MM 1900 LM 830 IP20 I CL. 18 W WHITE

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	575648	<b>Diffuser type:</b>	OPAL
<b>EAN:</b>	5905963575648	<b>Colour of the body:</b>	white
<b>Rated power [W] - range:</b>	18	<b>Material of the body:</b>	Steel
<b>Luminous flux of the luminaire [lm] - range:</b>	1900	<b>Dimensions (H/W/T/S) [mm]:</b>	128/701/106
<b>Supply voltage [V]:</b>	220 - 240	<b>Mounting dimensions [mm]:</b>	340
<b>Frequency [Hz]:</b>	50-60	<b>Ingress protection:</b>	IP20
<b>Colour temperature [K]:</b>	3000	<b>Working temperature [°C]:</b>	from -25 to +35
<b>Luminous efficacy [lm/W]:</b>	106	<b>Diode PCB material:</b>	aluminium
<b>Electrical protection class:</b>	I	<b>Net weight [kg]:</b>	2.260
<b>SDCM:</b>	≤ 3	<b>Warranty [years]:</b>	5
<b>LED lifespan L70B50 [h]:</b>	99000	<b>Category type:</b>	architectural
<b>LED lifespan L80B20 [h]:</b>	63000	<b>Category of application:</b>	architectural
<b>LED lifespan L90B10 [h]:</b>	31000	<b>CE certificate:</b>	<a href="#">208/2023</a>
<b>Beam angle [°]:</b>	116 x 58	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Light distribution type:</b>	open space	<b>Plik LDT:</b>	<a href="#">Download</a>
<b>Efficiency of the luminaire:</b>	0.74		
<b>Diffuser material:</b>	PC		

## LIGHT CURVES

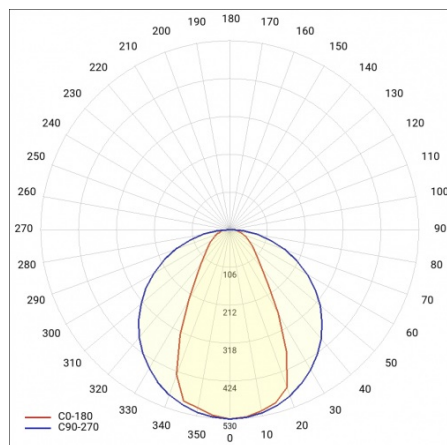

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 208/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl