

# MESSAGGIO BRACKET 1541 MM 3400 LM 830 IP20 I CL. DALI 64 W BLACK

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Rated power [W] - range:</b>	64
<b>Luminous flux of the luminaire [lm] - range:</b>	3400
<b>Luminous efficacy [lm/W]:</b>	53
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	3000
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

Wall lamps from the Messaggio collection, available in a variety of colors and sizes, can create spectacular light and decorative compositions, designed according to the architect's individual concepts. The LED modules used in the lamps ensure a high level of energy efficiency. The steel, solid, yet visually delicate housing can be painted in the interior and exterior parts in two different RAL colors. The milky lampshade is made of impact-resistant polycarbonate.

Messaggio wall lamps also come in a version with DALI control, which allows you to adjust the value of the luminous flux.

## APPLICATION

Messaggio is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.


# MESSAGGIO BRACKET 1541 MM 3400 LM 830 IP20 I CL. DALI 64 W BLACK

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	575730	Diffuser type:	OPAL
EAN:	5905963575730	Colour of the body:	black
Rated power [W] - range:	64	DIMM DALI:	yes
Luminous flux of the luminaire [lm] - range:	3400	Material of the body:	Steel
Supply voltage [V]:	220 - 240	Dimensions (H/W/T/S) [mm]:	128/1541/70
Frequency [Hz]:	50-60	Mounting dimensions [mm]:	340
Colour temperature [K]:	3000	Ingress protection:	IP20
Luminous efficacy [lm/W]:	53	Working temperature [°C]:	from -25 to +35
Electrical protection class:	I	Diode PCB material:	aluminium
SDCM:	≤ 3	Control:	yes
LED lifespan L70B50 [h]:	99000	Net weight [kg]:	4.640
LED lifespan L80B20 [h]:	63000	Warranty [years]:	5
LED lifespan L90B10 [h]:	31000	Category type:	architectural
Beam angle [°]:	116 x 58	Category of application:	architectural
Light distribution type:	open space	CE certificate:	<a href="#">208/2023</a>
Efficiency of the luminaire:	0.37	Manual:	<a href="#">Download PDF</a>
Diffuser material:	PC	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

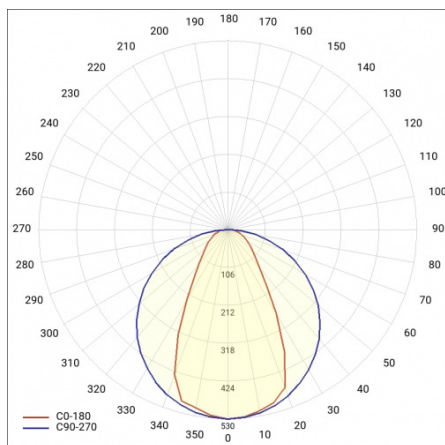

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 208/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)