

# MESSAGGIO BRACKET XS 100 LM 827 IP20 I CL. DALI 2 W WHITE

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Rated power of the luminaire [W]*:</b>	2
<b>Luminous flux [lm]*:</b>	100
<b>Electrical protection class:</b>	I
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	OPAL
<b>Material of the body:</b>	Steel
<b>Colour of the body:</b>	white
<b>Dimensions (H/W/T/S) [mm]:</b>	200/130/140

## CHARACTERISTICS

Messaggio small wall sconces surprise with their minimalist form and color personalization option. The lamps can be painted in any shade from the RAL palette and create phenomenal light decorations, designed according to the architect's individual concepts. The lamp housing is made of sturdy but visually delicate steel, while the lampshade is made of milky PC.

Messaggio wall lamps also come in a version with DALI control, which allows you to adjust the value of the light output.

## APPLICATION

Messaggio is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.


# MESSAGGIO BRACKET XS 100 LM 827 IP20 I CL. DALI 2 W WHITE

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	578250	<b>Diffuser material:</b>	PC
<b>EAN:</b>	5905963578250	<b>Diffuser type:</b>	OPAL
<b>Light source:</b>	LED module	<b>Diffuser colour:</b>	milky
<b>Rated power of the luminaire [W]:</b>	2	<b>Material of the body:</b>	Steel
<b>Luminous flux [lm]:</b>	100	<b>Colour of the body:</b>	white
<b>Supply voltage [V]:</b>	220 – 240	<b>Dimensions (H/W/T/S) [mm]:</b>	200/130/140
<b>Frequency [Hz]:</b>	50-60	<b>Ingress protection:</b>	IP20
<b>Electrical protection class:</b>	I	<b>Working temperature [°C]:</b>	from -25 to +35
<b>Colour temperature [K]:</b>	2700	<b>Warranty [years]:</b>	5
<b>SDCM:</b>	≤ 3	<b>Category type:</b>	architectural
<b>DIMM DALI:</b>	yes	<b>Category of application:</b>	architectural
<b>LED lifespan L70B50 [h]:</b>	99000	<b>CE certificate:</b>	<a href="#">209/2023</a>
<b>LED lifespan L80B20 [h]:</b>	63000	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>LED lifespan L90B10 [h]:</b>	31000	<b>Plik LDT:</b>	<a href="#">Download</a>

## LIGHT CURVES

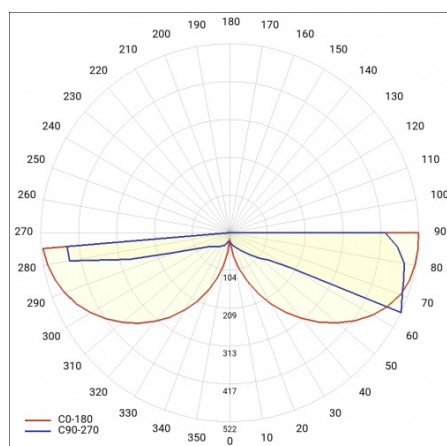

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 209/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl