


SATURN LED HV 14W MAT BIAŁY RCR 4000K

DETAILED CARD

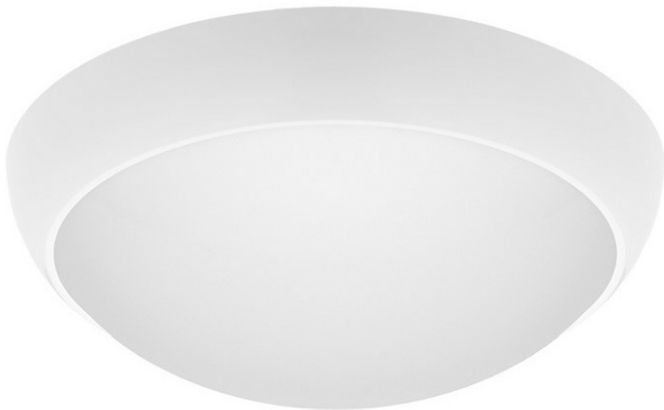

TECHNICAL PARAMETERS

Index:	x
Ingress protection:	IP54
Impact resistance:	IK10
Nominal power [W]:	9
Luminous flux [lm]*:	800 - 1750
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Electrical protection class:	I; II
Energy efficiency class:	E; F

CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux, high ingress protection class IP54 and an integrated energy-saving light source LED GO!. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact resistant PC ensures the highest impact resistance of the fitting (IK10). Available ring colors; optional equipment: radio motion sensor (RCR) or PIR sensor.

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms.


SATURN LED HV 14W MAT BIAŁY RCR 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	moduł LED	Impact resistance:	IK10
Nominal power [W]:	9	Ingress protection:	IP54
Rated power of the luminaire [W]:	10	Mounting version:	natynkowy
Supply voltage [V]:	220-240	Working temperature [°C]:	od -20 do +35; od 0 do +35
Frequency [Hz]:	50-60	Corridor function:	yes
Luminous flux [lm]:	800 - 1750	Motion sensor:	yes
Energy efficiency class:	E; F	Emergency lighting [h]:	1; 2; 3
Electrical protection class:	I; II	DIMM 1-10V:	yes
Colour temperature [K]:	3000; 4000	DIMM DALI:	yes
Colour rendering index:	>80	CE certificate:	406/2023; 407/2023; 65/2015; 99/2013
SDCM:	≤ 3	Index:	x
Power factor:	0.53	EAN:	x
LED lifespan L70B50 [h]:	115000	Category type:	bulkheads
Diffuser material:	PC	Version:	Antywandal
Diffuser type:	OPAL	Warranty [years]:	2 / 0.5 (bateria); 5
Material of the body:	PP	ETIM class:	EC002892
Colour of the body:	Złoty MAT; biały; czarny; satynowy; srebrny; złoty	Photobiological safety:	grupa ryzyka 1 (niskie ryzyko)
Dimensions (H/W/T/S) [mm]:	ø335/110	Manual:	Download PDF

LIGHT CURVES

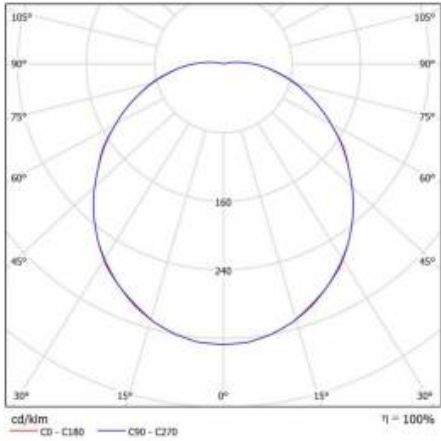

Card creation date: 30 May 2021
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 99/2013

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl