

COMPACT LED EVO Z 6550LM PRM RCR I KL. IP20 620X620 840 (52W) CORRIDOR

DETAILED CARD



TECHNICAL PARAMETERS

Light source:	LED module
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	52
Luminous flux [lm]*:	6550
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	D
Electrical protection class:	I

CHARACTERISTICS

Compact LED luminaire designed for suspended installation. Equipped with energy-saving LED panels and an evenly highlighted opal or prismatic diffuser, providing low glare (UGR<19)*. Made of plastic. Assembly or electrical connection does not require removing the diffuser. Suspension in the set, length 1.2m.

* The UGR coefficient is met for the typical use of the luminaire

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.


COMPACT LED EVO Z 6550LM PRM RCR I KL. IP20 620X620 840 (52W) CORRIDOR

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	630163	Mounting version:	suspended
Light source:	LED module	Working temperature [°C]:	from -25 to +60
Nominal power [W]:	52	Corridor function:	yes
Rated power of the luminaire [W]:	53	Motion sensor:	yes
Supply voltage [V]:	220-240	DIMM DALI:	yes
Frequency [Hz]:	50 - 60	Net weight [kg]:	5.850
Luminous flux [lm]:	6550	CE certificate:	360/2023
Luminous efficacy [lm/W]:	123	PZH certificate:	B-BK-60212-0070/20 B-BK-60212-0042/20
Energy efficiency class:	D	EAN:	5905963630163
Electrical protection class:	I	Category type:	louvres
Colour temperature [K]:	4000	LED lifespan L70B50 [h]:	115000
Colour rendering index:	>80	LED lifespan L80B20 [h]:	72000
SDCM:	≤ 3	LED lifespan L90B10 [h]:	35000
Beam angle [°]:	120	Power factor:	0.95
Diffuser material:	PC	Warranty [years]:	5
Diffuser type:	PRM	ETIM class:	EC001743
Material of the body:	ABS	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour of the body:	white	Warranty [years]:	5
Dimensions (H/W/T/S) [mm]:	620/620/69	Manual:	Download PDF
Impact resistance:	IK07	ENEC Certificate:	PL BBJ/009/2021/M1
Ingress protection:	IP20		

LIGHT CURVES

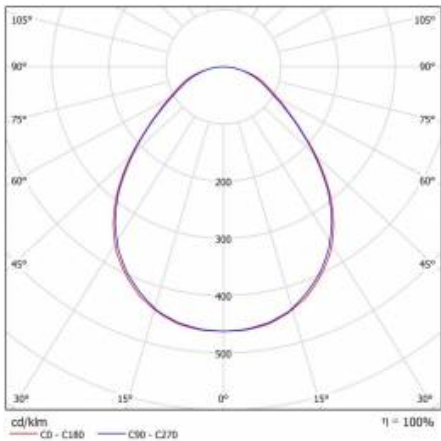


COMPACT LED EVO Z 6550LM PRM RCR I KL. IP20 620X620 840 (52W) CORRIDOR

DETAILED CARD
TECHNICAL DETAILS



COMPACT LED EVO Z - SYSTEM
ZWIESZANIA



COMPACT LED EVO PRM

Card creation date: 17 July 2023
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 360/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl