# CORAL LED EVO 260MM P 690LM IP44 830 (9W)

DETAILED CARD



## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 223907 |
| **Ingress protection:** | IP44 |
| **Nominal power [W]:** | 9 |
| **Luminous flux [lm]*:** | 690 |
| **Colour temperature [K]:** | 3000 |
| **SDCM:** | 3 |
| **Energy efficiency class:** | G |
| **Material of the body:** | PP |
| **Ring material:** | PP |
| **Diffuser material:** | PC |

## CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation.The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation.Surface-mounted luminaire allows cable termination.

## APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.


# CORAL LED EVO 260MM P 690LM IP44 830 (9W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | | | |
|---|---|---|---|
| **Light source:** | LED module | **Mounting dimensions [mm]:** | ø220 |
| **Nominal power [W]:** | 9 | **Impact resistance:** | IK10 |
| **Rated power of the luminaire [W]:** | 9.90 | **Ingress protection:** | IP44 |
| **Supply voltage [V]:** | 220-240 | **Mounting version:** | recessed |
| **Frequency [Hz]:** | 50 - 60 | **Working temperature [°C]:** | from -20 to +35 |
| **Luminous flux [lm]:** | 690 | **Net weight [kg]:** | 0.660 |
| **Luminous efficacy [lm/W]:** | 71 | **Gross weight [kg]:** | 0.880 |
| **Energy efficiency class:** | G | **Warranty [years]:** | 5 |
| **Electrical protection class:** | I | **Index:** | 223907 |
| **Colour temperature [K]:** | 3000 | **EAN:** | 5905963223907 |
| **Color rendering index (Ra) >:** | 80 | **Category type:** | bulkheads |
| **SDCM:** | 3 | **Product line:** | CORAL LED EVO |
| **Power factor:** | 0.61 | **AC voltage range [V]:** | 220 - 240 |
| **Exchangeable source:** | yes | **LED lifespan L70B50 [h]:** | 86000 |
| **Diffuser material:** | PC | **LED lifespan L80B10 [h]:** | 54000 |
| **Diffuser type:** | OPAL | **LED lifespan L90B10 [h]:** | 26000 |
| **Optics material:** | PMMA | **CE certificate:** | 73/2018 |
| **Material of the body:** | PP | **ETIM class:** | EC002892 |
| **Colour of the body:** | white | **Photobiological safety:** | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| **Ring material:** | PP | **Manual:** | Download PDF |
| **Ring colour:** | white | **Plik LDT:** | Download |
| **Dimensions (H/W/T/S) [mm]:** | ø260/108 | | |


## LIGHT CURVES

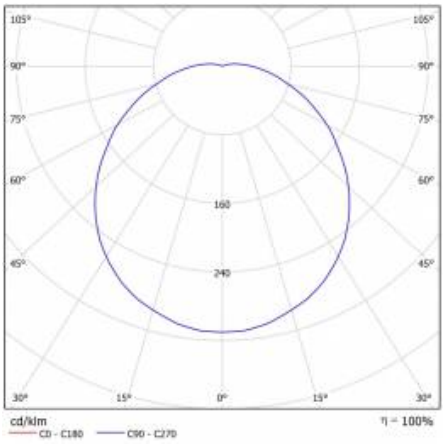

# CORAL LED EVO 260MM P 690LM IP44 830 (9W)

DETAILED CARD

## TECHNICAL DETAILS



CORAL LED natynkowe prowadzenie przewodów

# CORAL LED EVO 260MM P 690LM IP44 830 (9W)

DETAILED CARD

## ACCESSORIES AVAILABLE

| index | Name |
|---|---|
| 223969 | CORAL LED EVO 830 - SERVICE KIT |
| 223983 | CORAL LED EVO 830 RCR - SERVICE KIT |
| 223976 | CORAL LED EVO 840 - SERVICE KIT |
| 223990 | CORAL LED EVO 840 RCR - SERVICE KIT |



The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 73/2018

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl