INDO LED EVO P 3700LM PLX 840 (34W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380969
Ingress protection:	IP20
Nominal power [W]:	34
Luminous flux [lm]*:	3700
Colour temperature [K]:	4000
SDCM:	3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PMMA
Diffuser type:	OPAL

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED light source. Powder-coated steel body. The lens diffuser is made of metal sheet and opalized PMMA. It provides comfortable and soft light.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps

INDO LED EVO P 3700LM PLX 840 (34W)


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380969
Light source:	LED module
Nominal power [W]:	34
Rated power of the luminaire [W]:	36.80
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Luminous flux [lm]:	3700
Luminous efficacy [lm/W]:	100
Energy efficiency class:	E
Electrical protection class:	I
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Power factor:	0.96
LED lifespan L70B50 [h]:	50 000
Diffuser material:	PMMA
Diffuser type:	OPAL

Material of the body:	powder coated steel
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	106/595/595
Impact resistance:	IK07
Ingress protection:	IP20
Mounting version:	recessed
Working temperature [°C]:	from -20 to +35
EAN:	5905963380969
Category type:	troffers
AC voltage range [V]:	198 – 264
ETIM class:	EC002892
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Warranty [years]:	5
Manual:	Download PDF
CE certificate:	367/2023
Plik LDT:	Download

LIGHT CURVES

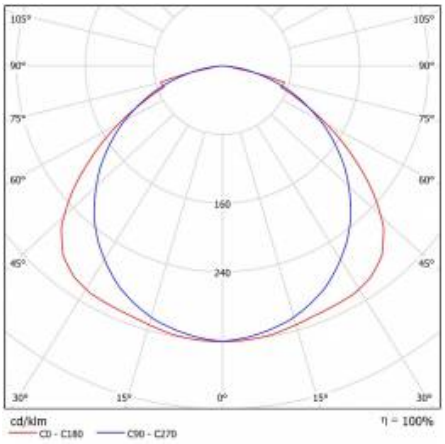


INDO LED EVO P 3700LM PLX 840 (34W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE



Frame adapter KG 635x635
WHITE (374845)

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 367/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl