


# ALTEZZO A 150 900MM 2100LM 840 IP65 RAL7016 21W

---

DETAILED CARD

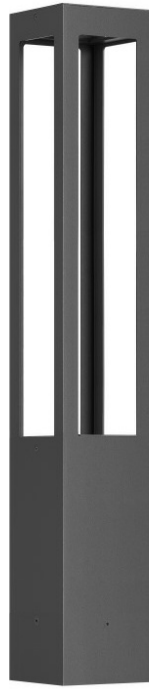

# ALTEZZO A 150 900MM 2100LM 840 IP65 RAL7016 21W

## DETAILED CARD

### TECHNICAL PARAMETERS

<b>Index:</b>	413162
<b>Ingress protection:</b>	IP65
<b>Impact resistance:</b>	IK08
<b>Nominal power [W]:</b>	20.70
<b>Luminous flux [lm]*:</b>	2100
<b>Colour temperature [K]:</b>	4000
<b>Material of the body:</b>	aluminium
<b>Colour of the body:</b>	RAL7016
<b>Diffuser type:</b>	transparent
<b>Beam angle [°]:</b>	110

### CHARACTERISTICS

A family of outdoor lamps with a modern design. The decorative, openwork housing gives the luminaire a lightweight appearance while providing an interesting distribution of accent light. The compact (150mm x 150mm), square-shaped lamp profile is impact-resistant (IK08 or IK09). It is made of aluminium in graphite (RAL 7016). The light module consists of long-life LEDs with a durable polycarbonate aperture. The lamp will provide energy-efficient lighting and safety for users of outdoor areas.

### APPLICATION

They are designed for outdoor use. The high tightness of the lamps allows them to be used in harsh weather conditions. They can operate in very low and high temperatures. They will work well in parks and gardens to illuminate small architecture.

### DETAILS

The selection of the foundation for the lighting column, in accordance with the Building Act, rests with the designer, with the relevant qualifications. The designer is also obliged to check the standard solution from the lighting manufacturer's offer, as he knows, among other things, the soil and water conditions in the designed area. If the dedicated foundation does not provide the safe conditions specified in the design, a suitable one should be selected from outside the lighting manufacturer's offer, with an anchor spacing of 180x180 - 220x220mm. As standard, in the case of Altezzo L100, universal 13kg foundations are used for garden lamps or FBO 35/7.5 M6 foundations for taller posts and/or more difficult ground and water conditions. For Altezzo L150, B-50 universal foundations or B-51 foundations are used for taller posts and/or more difficult soil and water conditions.

# ALTEZZO A 150 900MM 2100LM 840 IP65 RAL7016 21W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	413162	Colour of the body:	RAL7016
EAN:	5905963413162	Dimensions (H/W/T/S) [mm]:	150/150/900
Light source:	LED	Mounting dimensions [mm]:	75/75 - 90/90
Nominal power [W]:	20.70	Impact resistance:	IK08
Rated power of the luminaire [W]:	21	Ingress protection:	IP65
Supply voltage [V]:	220 - 240	Mounting version:	on a foundation
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -25 to +50
Luminous flux [lm]:	2100	Net weight [kg]:	5
Luminous efficacy [lm/W]:	102	Category type:	Park and city lighting
Energy efficiency class:	E	AC voltage range [V]:	90 - 264
Electrical protection class:	I	LED lifespan L70B50 [h]:	174000
Colour temperature [K]:	4000	LED lifespan L80B20 [h]:	110000
Colour rendering index:	80	LED lifespan L90B10 [h]:	53000
SDCM:	≤ 3	Light distribution type:	general
Beam angle [°]:	110	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Surge protection [kV]:	2	CE certificate:	<a href="#">179/2023</a>
Diffuser type:	transparent	Manual:	<a href="#">Download PDF</a>
Material of the body:	aluminium	Plik LDT:	<a href="#">Download</a>

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 179/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)