
# MESSAGGIO 1541 MM 2050 - 3600 LM 840 IP20 I CL. 35 - 64 W RAL8029 RAL1035

DETAILED CARD

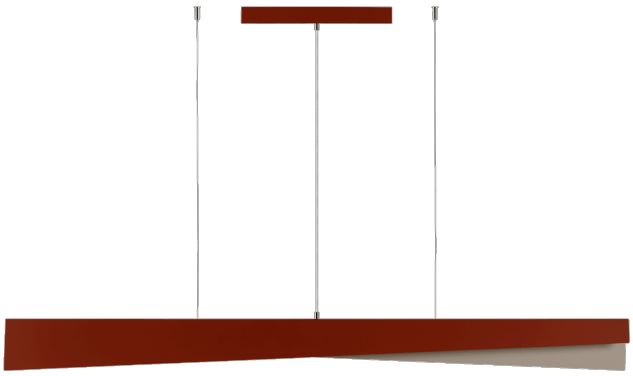

## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 579318 |
| **Light source:** | LED |
| **Rated power [W] - range:** | 35 - 64 |
| **Luminous flux of the luminaire [lm] - range:** | 2050 - 3600 |
| **Supply voltage [V]:** | 220 - 240 |
| **Frequency [Hz]:** | 50 - 60 |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 4000 |
| **Ingress protection:** | IP20 |
| **Diffuser material:** | PC |

## CHARACTERISTICS

The Messaggio collection, designed by Dorota Koziara, includes pendant lamps with a minimalist form. They can come in all RAL colors, including a multicolor version, where the outside of the housing and the inside of the lamp have different colors. In this way, Messaggio provides unlimited design possibilities.

Thanks to the possibility of adjusting the length of the pendants from the Messaggio lamps, surprising light compositions can be created. Versions with DALI control allow you to change the value of the light output, which further enhances the decorative effect. The milky lampshade is made of PC, while the housing is made of solid yet visually delicate steel, which ensures the durability of the product.

## APPLICATION

Messaggio is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.

# MESSAGGIO 1541 MM 2050 - 3600 LM 840 IP20 I CL. 35 - 64 W RAL8029 RAL1035

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | |
|---|---|
| **Index:** | 579318 |
| **EAN:** | 5905963579318 |
| **Light source:** | LED |
| **Rated power [W] - range:** | 35 - 64 |
| **Luminous flux of the luminaire [lm] - range:** | 2050 - 3600 |
| **Supply voltage [V]:** | 220 - 240 |
| **Frequency [Hz]:** | 50 - 60 |
| **Luminous efficacy [lm/W]:** | 56 |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 4000 |
| **SDCM:** | 3 |
| **LED lifespan L70B50 [h]:** | 99000 |
| **LED lifespan L80B10 [h]:** | 63000 |
| **LED lifespan L90B10 [h]:** | 31000 |
| **Beam angle [°]:** | 116 x 58 |
| **Light distribution type:** | open space |
| **Diffuser material:** | PC |

| | |
|---|---|
| **Diffuser type:** | OPAL |
| **Diffuser colour:** | milky |
| **Material of the body:** | Steel |
| **Colour of the body:** | RAL8029/1035 |
| **Dimensions (H/W/T/S) [mm]:** | 1230/1541/80 |
| **Mounting dimensions [mm]:** | 340 |
| **Ingress protection:** | IP20 |
| **Mounting version:** | suspended |
| **Working temperature [°C]:** | from -25 to +35 |
| **Diode PCB material:** | aluminium |
| **Net weight [kg]:** | 5.220 |
| **Warranty [years]:** | 5 |
| **Category type:** | decorative fixtures |
| **CE certificate:** | 207/2023 |
| **Manual:** | Download PDF |
| **Plik LDT:** | Download |

Card creation date: 18 December 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 207/2023

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl