


# MESSAGGIO 1541 MM 2950 LM 840 IP20 I CL. DALI 64 W RAL5025 RAL4011

DETAILED CARD

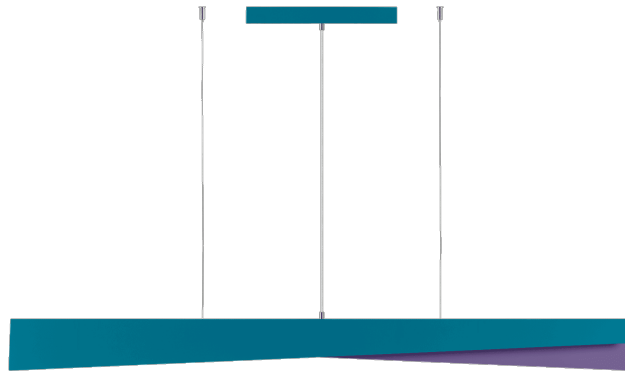

## TECHNICAL PARAMETERS

<b>Index:</b>	579165
<b>Light source:</b>	LED
<b>Rated power [W] - range:</b>	64
<b>Luminous flux of the luminaire [lm] - range:</b>	2950
<b>Supply voltage [V]:</b>	220 - 240
<b>Frequency [Hz]:</b>	50 - 60
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	4000
<b>Ingress protection:</b>	IP20
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

The Messaggio collection, designed by Dorota Koziara, includes pendant lamps with a minimalist form. They can come in all RAL colors, including a multicolor version, where the outside of the housing and the inside of the lamp have different colors. In this way, Messaggio provides unlimited design possibilities.

Thanks to the possibility of adjusting the length of the pendants from the Messaggio lamps, surprising light compositions can be created. Versions with DALI control allow you to change the value of the light output, which further enhances the decorative effect. The milky lampshade is made of PC, while the housing is made of solid yet visually delicate steel, which ensures the durability of the product.

## APPLICATION

Messaggio is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.

# MESSAGGIO 1541 MM 2950 LM 840 IP20 I CL. DALI 64 W RAL5025 RAL4011

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	579165	<b>Diffuser material:</b>	PC
<b>EAN:</b>	5905963579165	<b>Diffuser type:</b>	OPAL
<b>Light source:</b>	LED	<b>Diffuser colour:</b>	milky
<b>Rated power [W] - range:</b>	64	<b>Material of the body:</b>	Steel
<b>Rated power of the luminaire [W]:</b>	64	<b>Colour of the body:</b>	RAL5025/4011
<b>Luminous flux of the luminaire [lm] - range:</b>	2950	<b>Dimensions (H/W/T/S) [mm]:</b>	1230/1541/80
<b>Luminous flux [lm]:</b>	2950	<b>Mounting dimensions [mm]:</b>	340
<b>Supply voltage [V]:</b>	220 - 240	<b>Ingress protection:</b>	IP20
<b>Frequency [Hz]:</b>	50 - 60	<b>Mounting version:</b>	suspended
<b>Luminous efficacy [lm/W]:</b>	46	<b>Working temperature [°C]:</b>	from -25 to +35
<b>Electrical protection class:</b>	I	<b>Diode PCB material:</b>	aluminium
<b>Colour temperature [K]:</b>	4000	<b>DIMM DALI:</b>	yes
<b>SDCM:</b>	≤ 3	<b>Control:</b>	yes
<b>LED lifespan L70B50 [h]:</b>	99000	<b>Net weight [kg]:</b>	4.870
<b>LED lifespan L80B20 [h]:</b>	63000	<b>Warranty [years]:</b>	5
<b>LED lifespan L90B10 [h]:</b>	31000	<b>Category type:</b>	architectural
<b>Beam angle [°]:</b>	116 x 58	<b>CE certificate:</b>	<a href="#">207/2023</a>
<b>Light distribution type:</b>	open space	<b>Manual:</b>	<a href="#">Download PDF</a>

Card creation date: 14 June 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 207/2023