

CORIA 2 1750LM 300MM DALI I CL. IP44 SUSPENDED MICROPRM BLACK MAT 840 15W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	415456
Ingress protection:	IP40
Impact resistance:	IK03
Rated power [W] - range:	15
Luminous flux of the luminaire [lm] - range:	1750
Colour temperature [K]:	4000
Colour rendering index:	>80
Electrical protection class:	I
Material of the body:	aluminium
Colour of the body:	black

CHARACTERISTICS

The Coria 2 LED circular luminaire with integrated energy-efficient LED module is characterised by its high luminous efficacy and uniform light distribution. Its base is made of white or black powder-coated aluminium and its diffuser is made of microprism (300mm diameter version only) or opal plastic. It is ideal for new applications and for replacing traditional fluorescent lamps with energy-efficient LED solutions. Characteristics: colour temperature 3000K, 4000K; CRI>80; LED module life 119,000 hours (L80B20) ta = 25°C; pendant or surface-mounted version.

APPLICATION

The luminaire is designed for indoor use. It is characterised by even light distribution and good surface illumination, which is why it is particularly dedicated as a source of general light in representative rooms and passageways. Thanks to its excellent luminous parameters, the luminaire is ideal for large conference rooms. The luminaire's construction has been adapted for surface-mounted or flush-mounted installation in plasterboard ceilings. Revit files for architectural luminaires are available on request.


CORIA 2 1750LM 300MM DALI I CL. IP44 SUSPENDED MICROPRM BLACK MAT 840 15W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	415456	Mounting dimensions [mm]:	109/109
EAN:	5905963415456	Impact resistance:	IK03
Light source:	LED	Ingress protection:	IP40
Rated power [W] - range:	15	Mounting version:	suspended
Colour temperature [K]:	4000	Working temperature [°C]:	from -10 to +35
Supply voltage [V]:	220 - 240	Dimensions of single box [mm]:	325/325/90
Luminous flux of the luminaire [lm] - range:	1750	Number on the palette [pcs]:	42
Frequency [Hz]:	50 - 60	Net weight [kg]:	2.400
Diffuser type:	PRM	Category type:	bulkheads
Luminous efficacy [lm/W]:	115	LED lifespan L70B50 [h]:	102340
Energy efficiency class:	D	LED lifespan L80B20 [h]:	64800
Electrical protection class:	I	LED lifespan L90B10 [h]:	31670
Colour rendering index:	>80	Light distribution type:	lambertian
Surge protection [kV]:	1	Warranty [years]:	5
Diffuser material:	PC	CE certificate:	83/2023
Colour of the body:	black	Manual:	Download PDF
Material of the body:	aluminium	Plik LDT:	Download
DIMM DALI:	yes		
Dimensions (H/W/T/S) [mm]:	300/85		

LIGHT CURVES

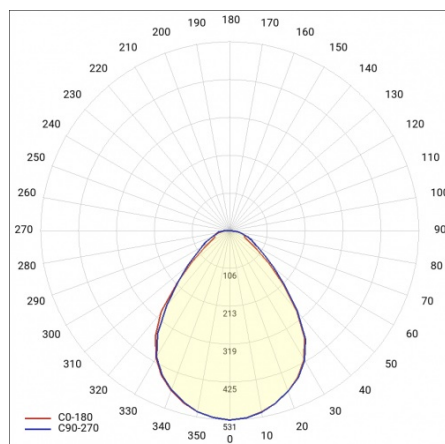

Card creation date: 11 January 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 83/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl