

COMPACT LED EVO N 42W 830 OPAL DALI I KL

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	42
Luminous flux [lm]*:	4450
Colour temperature [K]:	3000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	ABS
Diffuser material:	PC

CHARACTERISTICS

Compact LED luminaire designed for surface mounting. Equipped with energy-saving LED modules and an evenly highlighted opal or prismatic diffuser, providing low glare (UGR<19)*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.


COMPACT LED EVO N 42W 830 OPAL DALI I KL

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	629419	Ingress protection:	IP20
Light source:	LED module	Mounting version:	surface
Nominal power [W]:	42	Working temperature [°C]:	from -20 to +35
Rated power of the luminaire [W]:	43	DIMM DALI:	yes
Supply voltage [V]:	220-240	Net weight [kg]:	2.800
Frequency [Hz]:	50 - 60	CE certificate:	356/2023
Luminous flux [lm]:	4450	PZH certificate:	B-BK-60212-0070/20 B-BK-60212-0042/20
Luminous efficacy [lm/W]:	103	EAN:	5905963629419
Energy efficiency class:	E	Category type:	louvres
Electrical protection class:	I	LED lifespan L70B50 [h]:	125000
Colour temperature [K]:	3000	LED lifespan L80B20 [h]:	82000
Colour rendering index:	>80	LED lifespan L90B10 [h]:	40000
SDCM:	≤ 3	Warranty [years]:	5
Diffuser material:	PC	Power factor:	0.95
Diffuser type:	OPAL	ETIM class:	EC002892
Material of the body:	ABS	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour of the body:	white	Manual:	Download PDF
Dimensions (H/W/T/S) [mm]:	620/620/66	ENEC Certificate:	PL BBJ/009/2021/M1
Impact resistance:	IK07		

LIGHT CURVES

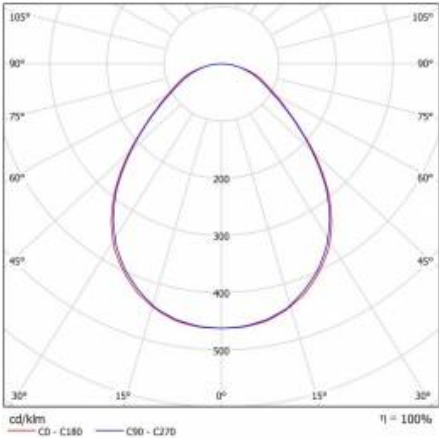


COMPACT LED EVO N 42W 830 OPAL DALI I KL

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
630279	Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special



Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special (630279)

Card creation date: 03 February 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 356/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl