

# COMPACT LED EVO N 8100LM PRM RCR I KL. IP20 620X620 840 (60W) CORRIDOR

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP20
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	60
<b>Luminous flux [lm]*:</b>	8100
<b>Colour temperature [K]:</b>	4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Energy efficiency class:</b>	D
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

Compact LED luminaire designed for surface mounting. Equipped with energy-saving LED modules and an evenly highlighted opal or prismatic diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.

## DETAILS

The corridor function makes it possible to adapt the lighting intensity in objects to changing conditions. In practice, it automatically reduces the lamp's luminous flux from 100% to 10%. Automatic mode 10 to 100 (version with RCR Hytronik motion detector) The lamp constantly illuminates at 10% of its luminous flux. When the motion sensor detects movement in the preset detection field, the lamp lights up to 100% luminous flux and remains on for the preset time. After the preset operating time, the lamp switches to energy-saving mode and illuminates 10% of the luminous flux. It is possible to connect an ON/OFF switch to switch the lamp off completely.


# COMPACT LED EVO N 8100LM PRM RCR I KL. IP20 620X620 840 (60W) CORRIDOR

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	630156	Mounting version:	surface
EAN:	5905963655289	Working temperature [°C]:	from -25 to +60
Light source:	LED module	Corridor function:	yes
Nominal power [W]:	60	Motion sensor:	yes
Rated power of the luminaire [W]:	60	DIMM DALI:	yes
Supply voltage [V]:	220-240	Net weight [kg]:	2.850
Frequency [Hz]:	50 - 60	Category type:	troffers
Luminous flux [lm]:	8100	LED lifespan L70B50 [h]:	115000
Luminous efficacy [lm/W]:	135	LED lifespan L80B10 [h]:	72000
Energy efficiency class:	D	LED lifespan L90B10 [h]:	35000
Electrical protection class:	I	Power factor:	0.95
Colour temperature [K]:	4000	ETIM class:	EC002892
Color rendering index (Ra) >:	80	Photobiological safety:	RG0 - exempt (no photobiological hazard)
SDCM:	3	Warranty [years]:	5
Diffuser material:	PC	CE certificate:	<a href="#">356/2023</a>
Diffuser type:	PRM	ENEC Certificate:	<a href="#">PL BBJ/009/2021/M1</a>
Material of the body:	ABS	Environmental Product Declaration (EPD):	<a href="#">944/2026</a>
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>
Dimensions (H/W/T/S) [mm]:	620/620/66	ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Impact resistance:	IK07	Plik LDT:	<a href="#">Download</a>
Ingress protection:	IP20		

## LIGHT CURVES

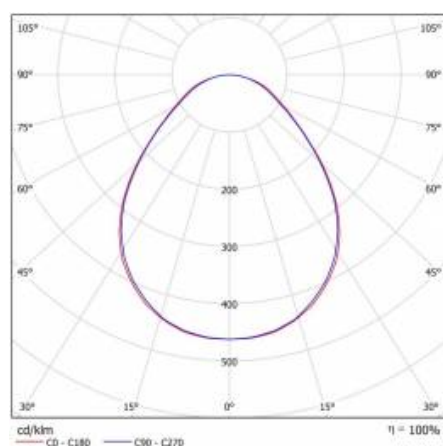

# COMPACT LED EVO N 8100LM PRM RCR I KL. IP20 620X620 840 (60W) CORRIDOR

---

DETAILED CARD

## TECHNICAL DETAILS

---



COMPACT LED EVO PRM

# COMPACT LED EVO N 8100LM PRM RCR I KL. IP20 620X620 840 (60W) CORRIDOR

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
630279	Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special



Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special (630279)

Card creation date: 28 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 356/2023