

INDO SMD LED P1 30W 3000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380181
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	2400
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	A

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO SMD LED P1 30W 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380181	Dimensions (H/W/T/S) [mm]:	595/595/105
Nominal power [W]:	30	Impact resistance:	IK07
Luminous flux [lm]:	2400	Ingress protection:	IP20
Luminous efficacy [lm/W]:	80	Net weight [kg]:	3.800
Energy efficiency class:	A	CE certificate:	29/2015
Electrical protection class:	I	Category type:	troffers
Colour temperature [K]:	3000	Warranty [years]:	5
Color rendering index (Ra) >:	80	ETIM class:	EC002892
SDCM:	3	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.95	Manual:	Download PDF
LED lifespan L70B50 [h]:	50000	Pliik LDT:	Download

LIGHT CURVES

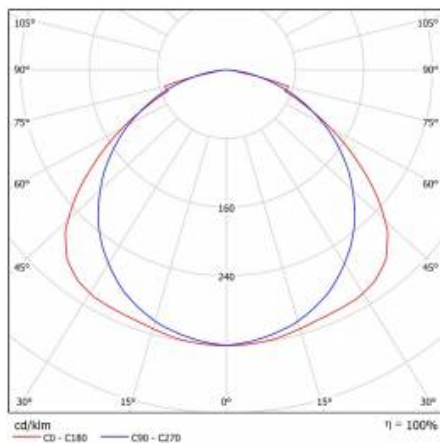

INDO SMD LED P1 30W 3000K

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE



Frame adapter KG 635x635
WHITE (374845)

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 29/2015