INDO SMD LED P1 30W 3000K DALI

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380242
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	2400
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	F
Material of the body:	powder coated steel

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.

INDO SMD LED P1 30W 3000K DALI


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380242
Light source:	LED module
Nominal power [W]:	30
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Luminous flux [lm]:	2400
Luminous efficacy [lm/W]:	80
Energy efficiency class:	F
Electrical protection class:	I
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
Power factor:	0.95
LED lifespan L70B50 [h]:	50000
Material of the body:	powder coated steel
Colour of the body:	white

Dimensions (H/W/T/S) [mm]:	595/595/105
Impact resistance:	IK07
Ingress protection:	IP20
Mounting version:	recessed
Working temperature [°C]:	from -25 to +35
DIMM DALI:	yes
Net weight [kg]:	3.800
CE certificate:	29/2015
EAN:	5905963380242
Category type:	troffers
Warranty [years]:	5
ETIM class:	EC002892
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Rated power of the luminaire [W]:	30
Manual:	Download PDF
Plik LDT:	Download

LIGHT CURVES

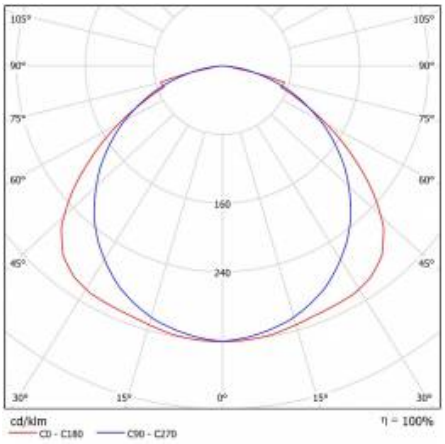


INDO SMD LED P1 30W 3000K DALI

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE



Frame adapter KG 635x635
WHITE (374845)

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 29/2015

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl