

INDO SMD LED P1 30W 3000K DALI

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380242
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	2400
Colour temperature [K]:	3000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	powder coated steel

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO SMD LED P1 30W 3000K DALI

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380242	Dimensions (H/W/T/S) [mm]:	595/595/105
Light source:	LED module	Impact resistance:	IK07
Nominal power [W]:	30	Ingress protection:	IP20
Supply voltage [V]:	220-240	Mounting version:	recessed
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -25 to +35
Luminous flux [lm]:	2400	DIMM DALI:	yes
Luminous efficacy [lm/W]:	80	Net weight [kg]:	3.800
Energy efficiency class:	F	CE certificate:	29/2015
Electrical protection class:	I	EAN:	5905963380242
Colour temperature [K]:	3000	Category type:	louvres
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 3	ETIM class:	EC002892
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	50000	Rated power of the luminaire [W]:	30
Material of the body:	powder coated steel	Manual:	Download PDF
Colour of the body:	white	Plik LDT:	Download

LIGHT CURVES

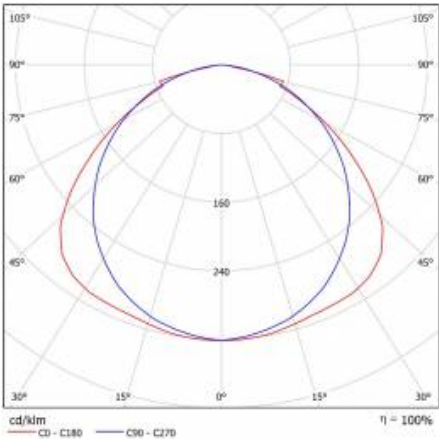

INDO SMD LED P1 30W 3000K DALI

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)




Plasterboard recessing kit 630x630
white (steel version) (999543)

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 29/2015