

# INDO LED 30W 4000K

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	380099
<b>Ingress protection:</b>	IP20
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	30
<b>Luminous flux [lm]*:</b>	2600
<b>Colour temperature [K]:</b>	4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	powder coated steel

## CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

## APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


# INDO LED 30W 4000K

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	380099	Colour of the body:	white
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	595/595/105
Nominal power [W]:	30	Impact resistance:	IK07
Supply voltage [V]:	220-240	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous flux [lm]:	2600	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	86	Net weight [kg]:	3.800
Energy efficiency class:	F	CE certificate:	<a href="#">29/2015</a>
Electrical protection class:	I	EAN:	5905963380099
Colour temperature [K]:	4000	Category type:	troffers
Color rendering index (Ra) >:	80	Warranty [years]:	5
SDCM:	3	ETIM class:	EC002892
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	50000	Rated power of the luminaire [W]:	30
Diffuser material:	powder coated steel	Manual:	<a href="#">Download PDF</a>
Diffuser type:	perforated	Pliik LDT:	<a href="#">Download</a>
Material of the body:	powder coated steel		

## LIGHT CURVES

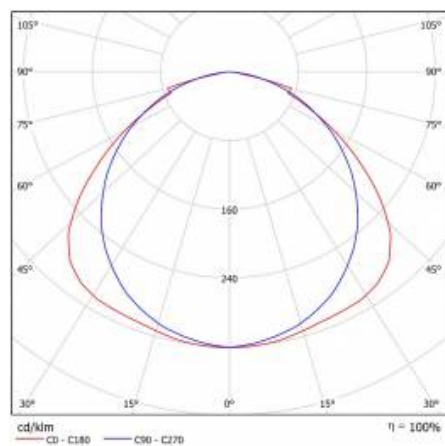

# INDO LED 30W 4000K

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE



Frame adapter KG 635x635  
WHITE (374845)

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 29/2015