

INDO LED 30W 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380099
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	2600
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	F
Material of the body:	powder coated steel

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO LED 30W 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380099	Colour of the body:	white
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	595/595/105
Nominal power [W]:	30	Impact resistance:	IK07
Supply voltage [V]:	220-240	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous flux [lm]:	2600	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	86	Net weight [kg]:	3.800
Energy efficiency class:	F	CE certificate:	29/2015
Electrical protection class:	I	EAN:	5905963380099
Colour temperature [K]:	4000	Category type:	troffers
Color rendering index (Ra) >:	80	Warranty [years]:	5
SDCM:	3	ETIM class:	EC002892
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	50000	Rated power of the luminaire [W]:	30
Diffuser material:	powder coated steel	Manual:	Download PDF
Diffuser type:	perforated	Plik LDT:	Download
Material of the body:	powder coated steel		

LIGHT CURVES

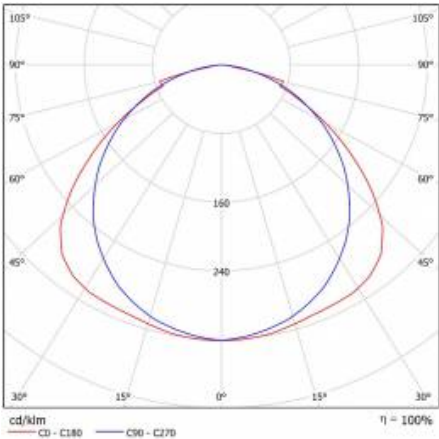


INDO LED 30W 4000K

DETAILED CARD

ACCESSORIES AVAILABLE


index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)



Plasterboard recessing kit 630x630
white (steel version) (999543)

Card creation date: 08 January 2025
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 29/2015