

INDO SMD LED P1 30W 4000K DALI

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380150
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	2600
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	A

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO SMD LED P1 30W 4000K DALI

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	30	LED lifespan L70B50 [h]:	50000
Index:	380150	Impact resistance:	IK07
Colour temperature [K]:	4000	Ingress protection:	IP20
Luminous flux [lm]:	2600	Net weight [kg]:	3.800
DIMM DALI:	yes	CE certificate:	29/2015
Dimensions (H/W/T/S) [mm]:	595/595/105	Category type:	louvres
Energy efficiency class:	A	Warranty [years]:	5
Luminous efficacy [lm/W]:	87	ETIM class:	EC002892
Electrical protection class:	I	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour rendering index:	>80	Manual:	Download PDF
SDCM:	≤ 3	Pliik LDT:	Download
Power factor:	0.95		

LIGHT CURVES

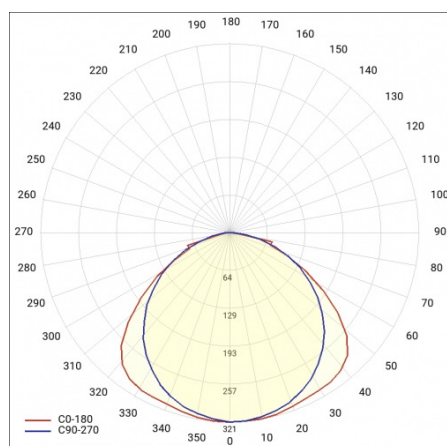

INDO SMD LED P1 30W 4000K DALI

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)



Plasterboard recessing kit 630x630
white (steel version) (999543)

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 29/2015