INDO SMD LED P1 30W 4000K DALI

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380150
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	2600
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	A

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO SMD LED P1 30W 4000K DALI

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380150	**Impact resistance:**	IK07
Nominal power [W]:	30	**Ingress protection:**	IP20
Luminous flux [lm]:	2600	**DIMM DALI:**	yes
Luminous efficacy [lm/W]:	87	**Net weight [kg]:**	3.800
Energy efficiency class:	A	**CE certificate:**	29/2015
Electrical protection class:	I	**Category type:**	troffers
Colour temperature [K]:	4000	**Warranty [years]:**	5
Color rendering index (Ra) >:	80	**ETIM class:**	EC002892
SDCM:	3	**Photobiological safety:**	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.95	**Manual:**	Download PDF
LED lifespan L70B50 [h]:	50000	**Plik LDT:**	Download
Dimensions (H/W/T/S) [mm]:	595/595/105		

LIGHT CURVES

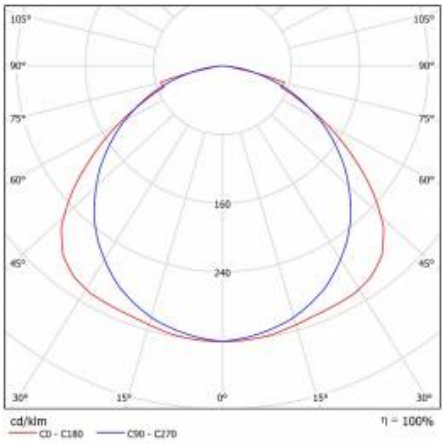


INDO SMD LED P1 30W 4000K DALI

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE



Frame adapter KG 635x635
WHITE (374845)

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 29/2015

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl