

EXPO LED 2 1297LM 38° BLACK 840 (9W)

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Rated power of the luminaire [W]*:	9
Luminous flux [lm]*:	1297
Colour temperature [K]:	4000
Colour rendering index:	>80
Energy efficiency class:	D
Material of the body:	aluminium
Optics material:	aluminium

CHARACTERISTICS

High quality aluminum projector with LED light source. Universal application with track system. Lack of ultraviolet emission or infrared radiation, high color rendering index, high luminous efficacy and durability.

APPLICATION

Possible use of specialized filters to highlight food stands. As accentuating lighting in commercial buildings, museums, exhibition halls and offices. For connection with track systems in the color of the projector.


EXPO LED 2 1297LM 38° BLACK 840 (9W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Rated power of the luminaire [W]:	9	Optics material:	aluminium
Index:	837623	Optics:	reflector
Colour temperature [K]:	4000	Material of the body:	aluminium
EAN:	5905963837623	Dimensions (H/W/T/S) [mm]:	107/225
Luminous flux [lm]:	1297	Ingress protection:	IP20
Light source:	LED	Net weight [kg]:	1.300
Beam angle [°]:	38°	Warranty [years]:	5
Colour of the body:	black	LED lifespan L90B10 [h]:	64000
Colour rendering index:	>80	Manual:	Download PDF
Luminous efficacy [lm/W]:	144	Supply voltage [V]:	220 - 240
Energy efficiency class:	D	Plik LDT:	Download
Electrical protection class:	I		

LIGHT CURVES

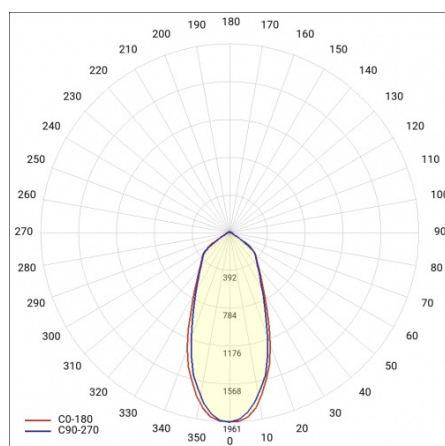

Card creation date: 07 July 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr:



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl