

# SQ 600 LED IOT BT RCR HYT 3400LM PRM I CL. 592X592MM 830 (24W)

DETAILED CARD



## TECHNICAL PARAMETERS

Light source:	LED module
Nominal power [W]:	24
Luminous flux [lm]*:	3400
Supply voltage [V]:	220-240
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	136
Energy efficiency class:	D
Electrical protection class:	I
Colour temperature [K]:	3000
Diffuser colour:	transparent

## CHARACTERISTICS

The SQ 600 LED IoT is a new line of square raster lights. Designed from the ground up, the design introduces new solutions to ensure excellent light performance. The body is made of plastic for low weight. The diffuser provides the lamp with excellent light characteristics. Integrated LED module Ensures low power consumption and all the advantages of modern LED lamps. Degree of protection - dependent on mounting method: - surface-mounted - IP20, - recessed - IP44/20.**IoT characteristics**The **IoT BT RCR HYT** version has: a built-in **BT HYT** module allowing for programming functions in the Lena Lighting Clue app and real-time control; **RCR** motion and daylight sensor hidden under the shade and **ON/OFF** driver without dimming function of the light source.

## APPLICATION

Surface-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


# SQ 600 LED IOT BT RCR HYT 3400LM PRM I CL. 592X592MM 830 (24W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	670848	Diffuser type:	PRM
Light source:	LED module	Diffuser colour:	transparent
Nominal power [W]:	24	Material of the body:	ABS
Luminous flux [lm]:	3400	Colour of the body:	white
Supply voltage [V]:	220-240	Dimensions (H/W/T/S) [mm]:	592/592/44
Frequency [Hz]:	50-60	Ingress protection:	IP44/IP20
Luminous efficacy [lm/W]:	136	Mounting version:	surface mounted; recessed mounted in modular ceiling possible
Energy efficiency class:	D	Motion sensor:	yes
Electrical protection class:	I	Category type:	troffers
Colour temperature [K]:	3000	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Color rendering index (Ra) >:	80	Warranty [years]:	5
LED lifespan L70B50 [h]:	132000	CE certificate:	<a href="#">442/2023</a>
LED lifespan L80B10 [h]:	84000	PZH certificate:	<a href="#">B-BK-60112-0419/2025</a>
LED lifespan L90B10 [h]:	42000	Environmental Product Declaration (EPD):	<a href="#">944/2026</a>
Beam angle [°]:	120	Manual:	<a href="#">Download PDF</a>
Light distribution type:	open space	ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Diffuser material:	PS		

## LIGHT CURVES

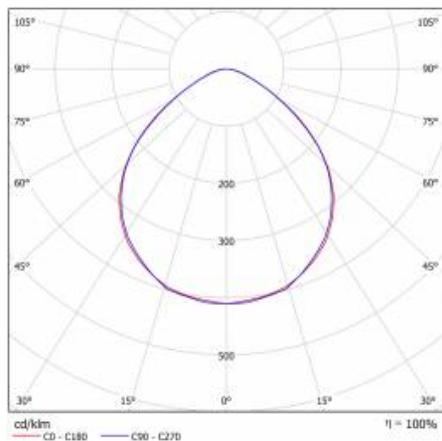

# SQ 600 LED IOT BT RCR HYT 3400LM PRM I CL. 592X592MM 830 (24W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
978395	Installation kit SQ 600 Ceiling system H40 100x100
374845	Frame adapter KG 635x635 WHITE



Frame adapter KG 635x635  
WHITE (374845)

Card creation date: 04 May 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 442/2023