INDO LED EVO P DALI 3450LM PLX 830 (34W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380945
Ingress protection:	IP20
Nominal power [W]:	34
Luminous flux [lm]*:	3450
Colour temperature [K]:	3000
SDCM:	3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PMMA
Diffuser type:	OPAL

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED light source. Powder-coated steel body. The lens diffuser is made of metal sheet and opalized PMMA. It provides comfortable and soft light.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps

INDO LED EVO P DALI 3450LM PLX 830 (34W)


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380945
Light source:	LED module
Nominal power [W]:	34
Rated power of the luminaire [W]:	36.80
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Luminous flux [lm]:	3450
Luminous efficacy [lm/W]:	93
Energy efficiency class:	E
Electrical protection class:	I
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
Power factor:	0.96
LED lifespan L70B50 [h]:	50 000
Diffuser material:	PMMA
Diffuser type:	OPAL

Material of the body:	powder coated steel
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	106/595/595
Impact resistance:	IK07
Ingress protection:	IP20
Mounting version:	recessed
Working temperature [°C]:	from -20 to +35
EAN:	5905963380952
Category type:	troffers
AC voltage range [V]:	198 – 264
ETIM class:	EC002892
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Warranty [years]:	5
Manual:	Download PDF
DIMM DALI:	yes
CE certificate:	77/2018
Plik LDT:	Download

LIGHT CURVES

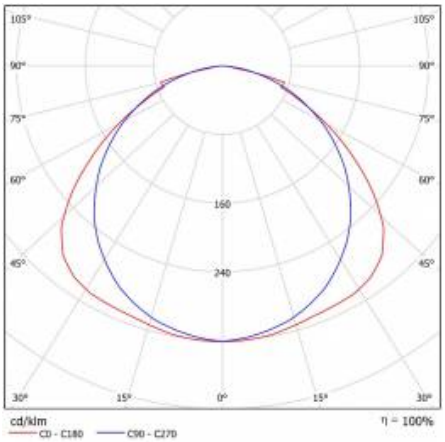


INDO LED EVO P DALI 3450LM PLX 830 (34W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE



Frame adapter KG 635x635
WHITE (374845)

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 77/2018

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl