
TERRA 3 LED P 1195X295MM X4 5300LM 840 BLACK MATT STRUCTURE (40W)

DETAILED CARD



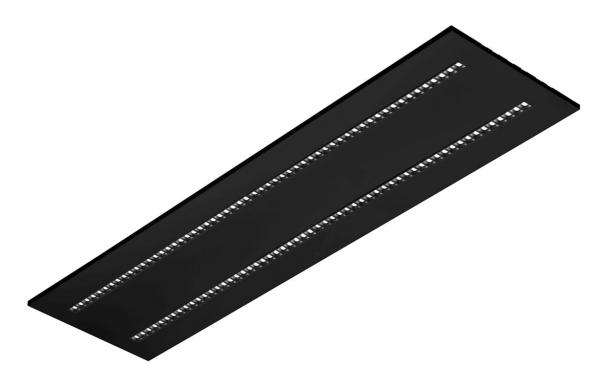

TECHNICAL PARAMETERS

Index: 418723

Rated power of the luminaire [W]*: 40

Luminous flux [lm]*: 5300

Colour temperature [K]: 4000

Colour rendering index: 80

Material of the body: powder coated steel

Colour of the body: black mat

Dimensions (H/W/T/S) [mm]: 1195/295/32

Mounting version: recessed

Energy efficiency class: D

CHARACTERISTICS

A luminaire equipped with energy-efficient LED modules characterised by high luminous flux. The low side profile provides an aesthetically pleasing, timeless appearance. Robust, compact construction. Made of powder-coated steel sheet. Patented high-performance HE reflector guarantees high efficiency while effectively eliminating glare.

APPLICATION

The versatile luminaire is designed for indoor use in offices or general utility rooms. Its high luminous parameters make it suitable as the main source of light and conducive to work requiring visual focus. The luminaire is suitable for both new applications and the replacement of traditional fluorescent lamps with energy-efficient LED solutions.



TERRA 3 LED P 1195X295MM X4 5300LM 840 BLACK MATT STRUCTURE (40W)


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index: 418723 EAN: 5905963418723 Light source: LED Rated power of the luminaire [W]: 40 Luminous flux [Im]: 5300 Luminous efficacy [Im/W]: 133 Ingress protection: IP20
Light source: Rated power of the luminaire [W]: 40 Luminous flux [Im]: 5300 Luminous efficacy [Im/W]: 133 Ingress protection: IP20
Rated power of the luminaire [W]: 40 Luminous flux [Im]: 5300 Luminous efficacy [Im/W]: 133 Ingress protection: IP20
Luminous flux [Im]: 5300 Luminous efficacy [Im/W]: 133 Ingress protection: IP20
Luminous efficacy [lm/W]: 133 Ingress protection: IP20
Ingress protection: IP20
• .
Energy efficiency class:
Electrical protection class:
Colour temperature [K]: 4000
Colour rendering index: 80
Beam angle [°]: 60
Diffuser material: PC
Diffuser type: matrix led
Diffuser colour: transparent
Optics material: PC

Material of the body:	powder coated steel
Colour of the body:	black mat
Dimensions (H/W/T/S) [mm]:	1195/295/32
Mounting version:	recessed
Number on the palette [pcs]:	60
Net weight [kg]:	1.930
Category type:	troffers
Version:	4x1
Light distribution type:	symmetric
LED lifespan L70B50 [h]:	150000
LED lifespan L80B20 [h]:	100000
LED lifespan L90B10 [h]:	50000
Warranty [years]:	5
CE certificate:	60/2025
Manual:	Download PDF
Plik LDT:	Download

LIGHT CURVES





TERRA 3 LED P 1195X295MM X4 5300LM 840 BLACK MATT STRUCTURE (40W)


DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)
374845	Frame adapter KG 635x635 WHITE
998966	Frame steel white structure RAL9016 600x600 SM "well effect"







Frame steel white structure RAL9016 600x600 SM "well effect" (998966)

