

# COLLINE X TERRANO H60.120 1550LM 840 II CL. WHITE 60D (10W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	407505
<b>EAN:</b>	5905963407505
<b>Light source:</b>	LED module
<b>Rated power of the luminaire [W]*:</b>	10
<b>Luminous flux [lm]*:</b>	1550
<b>Luminous efficacy [lm/W]:</b>	155
<b>Energy efficiency class:</b>	C
<b>Electrical protection class:</b>	II
<b>Colour temperature [K]:</b>	4000

## CHARACTERISTICS

Acoustic lamps created by Lena Lighting and Acustio. They provide, in addition to a spectacular design effect, glare-free lighting that is friendly to the senses (UGR ranges from 12 - 19) and sound attenuation at the level of high-class sound absorption. The luminaire is made of a triple layer of felt, which makes it durable while maintaining its softness. In addition, it can be coated with a layer of nano-silver in accordance with Acustio's proprietary brand technology - NanoFelt Ag. It provides high protection against the deposition of bacterial particles on the surface. Lighting, on the other hand, is based on energy-saving LED modules that emit light in two colors 4000K or 3000K (on request). It is also available with DALI control, allowing the light output to be adjusted to outdoor conditions, and compatibility with Lena Lighting's proprietary Clue control system. It allows you to set light scenes, dim lamps or program individual light output settings for individual lamps and group them together - all from an app on your phone or from the control panel. The modular design of Colline x Terrano, a choice of different acoustic panel embossings and a wide range of colors provide unlimited personalization possibilities.

## APPLICATION

Spaces conducive to both work and relaxation. They will work well in both offices and private homes, creating a friendly place for remote work, rest, sleep and entertainment.

## DETAILS


# COLLINE X TERRANO H60.120 1550LM 840 II CL. WHITE 60D (10W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	407505	AC voltage range [V]:	198-264
EAN:	5905963407505	DC voltage range [V]:	170-280
Rated power of the luminaire [W]:	10	Frequency [Hz]:	50-60
Light source:	LED module	SDCM:	≤ 3
Luminous flux [lm]:	1550	Flicker procent:	5
Luminous efficacy [lm/W]:	155	Diffuser material:	PC
Energy efficiency class:	C	Diffuser type:	matrix led
Colour temperature [K]:	4000	Diffuser colour:	transparent
Electrical protection class:	II	Mounting version:	suspended
Version:	H60.120	Working temperature [°C]:	from -10 to +35
Colour rendering index:	>80	Diode PCB material:	stal
Beam angle [°]:	60	Diode size [mm]:	3030
Light distribution type:	symmetric	Number on the palette [pcs]:	8
Optics:	lens	Net weight [kg]:	2.900
Optics material:	PC	LED lifespan L70B50 [h]:	156000
Dimensions (H/W/T/S) [mm]:	598/38/1115	LED lifespan L80B20 [h]:	98000
Ingress protection:	IP20	LED lifespan L90B10 [h]:	47000
Colour of the body:	white	Warranty [years]:	5
Category type:	architectural	CE certificate:	<a href="#">464/2023</a>
Category of application:	architectural	Manual:	<a href="#">Download PDF</a>
Supply voltage [V]:	220 - 240	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

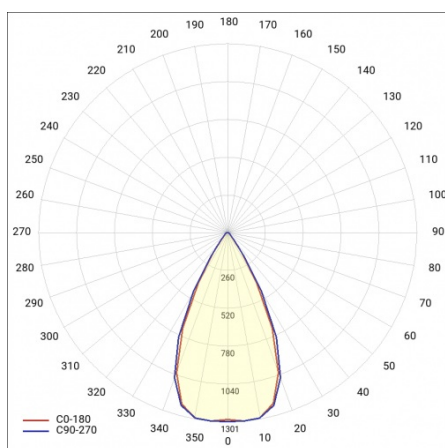

Card creation date: 31 August 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 464/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)