
### TERRA 3 LED N 595X595MM X4 6600LM 830 WHITE GLOSS (45W)

**DETAILED CARD** 



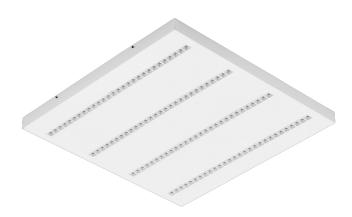

### **TECHNICAL PARAMETERS**

**Index:** 426919

Rated power of the luminaire [W]\*: 49

Luminous flux [lm]\*: 6600

Colour temperature [K]: 3000

Colour rendering index: 80

**Material of the body:** powder coated steel

Colour of the body: white gloss

**Dimensions (H/W/T/S) [mm]:** 595/595/37

Mounting version: surface

Energy efficiency class: D

### **CHARACTERISTICS**

A luminaire equipped with energy-efficient LED modules characterised by high luminous flux. The low side profile provides an aesthetically pleasing, timeless appearance. Robust, compact construction. Made of powder-coated steel sheet. Patented high-performance HE reflector guarantees high efficiency while effectively eliminating glare.

### **APPLICATION**

The versatile luminaire is designed for indoor use in offices or general utility rooms. Its high luminous parameters make it suitable as the main source of light and conducive to work requiring visual focus. The luminaire is suitable for both new applications and the replacement of traditional fluorescent lamps with energy-efficient LED solutions.



# TERRA 3 LED N 595X595MM X4 6600LM 830 WHITE GLOSS (45W)


**DETAILED CARD** 

#### **TECHNICAL PARAMETERS TABLE**

Index:		
Light source:  Rated power of the luminaire [W]:  Luminous flux [Im]:  Luminous efficacy [Im/W]:  Ingress protection:  Energy efficiency class:  Electrical protection class:  Colour temperature [K]:  Colour rendering index:	Index:	426919
Rated power of the luminaire [W]: 49  Luminous flux [Im]: 6600  Luminous efficacy [Im/W]: 135  Ingress protection: IP20  Energy efficiency class: D  Electrical protection class: II  Colour temperature [K]: 3000  Colour rendering index: 80	EAN:	5905963426919
Luminous flux [Im]:  Luminous efficacy [Im/W]:  Ingress protection:  Energy efficiency class:  Electrical protection class:  Colour temperature [K]:  Colour rendering index:  80	Light source:	LED
Luminous efficacy [lm/W]: 135 Ingress protection: IP20 Energy efficiency class: D Electrical protection class: II Colour temperature [K]: 3000 Colour rendering index: 80	Rated power of the luminaire [W]:	49
Ingress protection:  Energy efficiency class:  Electrical protection class:  Colour temperature [K]:  Colour rendering index:	Luminous flux [lm]:	6600
Energy efficiency class:  Electrical protection class:  Colour temperature [K]:  Colour rendering index:  80	Luminous efficacy [lm/W]:	135
Electrical protection class:  Colour temperature [K]:  Colour rendering index:  80	Ingress protection:	IP20
Colour temperature [K]: 3000  Colour rendering index: 80	Energy efficiency class:	D
Colour rendering index: 80	Electrical protection class:	II
	Colour temperature [K]:	3000
Been and [9].	Colour rendering index:	80
Beam angle [ ]:	Beam angle [°]:	60
Diffuser material: PC	Diffuser material:	PC
Diffuser type: matrix led	Diffuser type:	matrix led
Diffuser colour: transparent	Diffuser colour:	transparent
Optics material: PC	Optics material:	PC
	Optics:	lens

Material of the body:	powder coated steel
Colour of the body:	white gloss
Dimensions (H/W/T/S) [mm]:	595/595/37
Mounting version:	surface
Number on the palette [pcs]:	50
Net weight [kg]:	2.475
Category type:	troffers
Version:	4x1
Mounting dimensions [mm]:	300
Light distribution type:	symmetric
LED lifespan L70B50 [h]:	150000
LED lifespan L80B20 [h]:	100000
LED lifespan L90B10 [h]:	50000
Warranty [years]:	5
CE certificate:	61/2025
Manual:	Download PDF
Plik LDT:	Download

### **LIGHT CURVES**



## TERRA 3 LED N 595X595MM X4 6600LM 830 WHITE GLOSS (45W)


**DETAILED CARD** 

### **ACCESSORIES AVAILABLE**

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)
374845	Frame adapter KG 635x635 WHITE
998966	Frame steel white structure RAL9016 600x600 SM "well effect"







Frame steel white structure RAL9016 600x600 SM "well effect" (998966)

